

1-14-00

A

DOCKET NO. : MSFT-0108/127334.8

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of:

Marcus Peinado, Rajasekhar Abburi and
Jeffrey R. C. Bell

Serial No.: Not Yet Assigned

Group Art Unit: Not Yet Assigned

Filing Date: Herewith

Examiner: Not Yet Assigned

For: ENFORCEMENT ARCHITECTURE AND METHOD FOR DIGITAL RIGHTS
MANAGEMENT

EXPRESS MAIL LABEL NO: EL219292779US
DATE OF DEPOSIT: January 13, 2000

Box ☒ Patent Application
☐ Provisional ☐ Design

Assistant Commissioner for Patents
Washington DC 20231

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find

☒ A Utility Patent Application under 37 C.F.R. 1.53(b).

It is a continuing application, as follows:

☒ continuation ☐ divisional ☐ continuation-in-part of prior application number
09/290,363, filed April 12, 1999.

☐ A Provisional Patent Application under 37 C.F.R. 1.53(c).

☐ A Design Patent Application (submitted in duplicate).

☐☐☐

□

☒☐☐

-
- ☐ Signed Statement attached deleting inventor(s) named in the prior application.
- ☒ A Preliminary Amendment.
- ☐ _____ Sheets of ☐ Formal ☐ Informal Drawings.
- ☐ Petition to Accept Photographic Drawings.
- ☐ Petition Fee
- ☒ An ☐ Executed ☒ Unexecuted **Supplemental** Declaration or Oath and Power of Attorney.
- ☐ An Associate Power of Attorney.
- ☐ An ☐ Executed ☐ Copy of Executed Assignment of the Invention to _____
- ☐ A Recordation Form Cover Sheet.
- ☐ Recordation Fee - \$40.00.
- ☒ The prior application is assigned of record to Microsoft Corporation.
- ☒ Priority is claimed under 35 U.S.C. § 119 of Patent Application No. 60/126,614 filed March 27, 1998 in USA (country).
- ☐ A Certified Copy of each of the above applications for which priority is claimed:
- ☐ is enclosed.
- ☐ has been filed in prior application Serial No. _____ filed _____.
- ☐ An ☐ Executed or ☐ Copy of Executed Earlier Statement Claiming Small Entity Status under 37 C.F.R. 1.9 and 1.27
- ☐ is enclosed.
- ☐ has been filed in prior application Serial No. _____ filed _____, said status is still proper and desired in present case.

OFFICE OF THE COMPTROLLER

- ☐ Diskette Containing DNA/Amino Acid Sequence Information.
- ☐ Statement to Support Submission of DNA/Amino Acid Sequence Information.
- ☐ The computer readable form in this application _____, is identical with that filed in Application Serial Number _____, filed _____. In accordance with 37 CFR 1.821(e), please use the ☐ first-filed, ☐ last-filed or ☐ only computer readable form filed in that application as the computer readable form for the instant application. It is understood that the Patent and Trademark Office will make the necessary change in application number and filing date for the computer readable form that will be used for the instant application. A paper copy of the Sequence Listing is ☐ included in the originally-filed specification of the instant application, ☐ included in a separately filed preliminary amendment for incorporation into the specification.
- ☐ Information Disclosure Statement.
- ☐ Attached Form 1449.
- ☐ Copies of each of the references listed on the attached Form PTO-1449 are enclosed herewith.
- ☐ A copy of Petition for Extension of Time as filed in the prior case.
- ☐ Appended Material as follows: _____
- ☒ Return Receipt Postcard (should be specifically itemized).
- ☐ Other as follows: _____

FEE CALCULATION:

- ☐ Cancel in this application original claims _____ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☒ Please note that the Preliminary Amendment filed herewith cancels original claims 1-105 and adds new claims 106-163.

			SMALL ENTITY		NOT SMALL ENTITY	
			RATE	FEE	RATE	FEE
PROVISIONAL APPLICATION			\$75.00	\$	\$150.00	\$
DESIGN APPLICATION			\$155.00	\$	\$310.00	\$
UTILITY APPLICATIONS BASE FEE			\$345.00	\$	\$690.00	\$690
UTILITY APPLICATION; ALL CLAIMS CALCULATED AFTER ENTRY OF ALL AMENDMENTS						
	No. Filed	No. Extra				
TOTAL CLAIMS	58- 20 =	38	\$9 each	\$	\$18 each	\$684
INDEP. CLAIMS	3- 3 =	0	\$39 each	\$	\$78 each	\$0
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM			\$130	\$	\$260	\$0
ADDITIONAL FILING FEE				\$		\$0
TOTAL FILING FEE DUE				\$		\$1374


- ☒ A Check is enclosed in the amount of \$1374.00.
- ☒ The Commissioner is authorized to charge payment of the following fees and to refund any overpayment associated with this communication or during the pendency of this application to deposit account 23-3050. This sheet is provided in duplicate.
- ☐ The foregoing amount due.
- ☒ Any additional filing fees required, including fees for the presentation of extra claims under 37 C.F.R. 1.16.
- ☒ Any additional patent application processing fees under 37 C.F.R. 1.17 or 1.20(d).
- ☐ The issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance.

☒ The Commissioner is hereby requested to grant an extension of time for the appropriate length of time, should one be necessary, in connection with this filing or any future filing submitted to the U.S. Patent and Trademark Office in the above-identified application during the pendency of this application. The Commissioner is further authorized to charge any fees related to any such extension of time to deposit account 23-3050. This sheet is provided in duplicate.

SHOULD ANY DEFICIENCIES APPEAR with respect to this application, including deficiencies in payment of fees, missing parts of the application or otherwise, the United States Patent and Trademark Office is respectfully requested to promptly notify the undersigned.

Date:

Date: Jan 13 ~~19~~ 2000


Steven H. Meyer
Registration No. 37,189

Woodcock Washburn Kurtz
Mackiewicz & Norris LLP
One Liberty Place - 46th Floor
Philadelphia PA 19103
Telephone: (215) 568-3100
Facsimile: (215) 568-3439

DOCKET NO.: MSFT-108 / 127334.8

PATENT

- 1 -

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Marcus Peinado, Rajasekhar Abburi, and Jeffrey R.C. Bell

Serial No.: **Not Yet Assigned**

Group Art Unit: **Not Yet Assigned**

Filed: **Herewith**

Examiner: **Not Yet Assigned**

For: **ENFORCEMENT ARCHITECTURE AND METHOD FOR DIGITAL
RIGHTS MANAGEMENT**

Express Mail No. EL21929279US

Date: January 13, 2000

Assistant Commissioner
for Patents
Washington, D.C. 20231

Dear Sir:

PRELIMINARY AMENDMENT

Prior to examining the above-identified application, please amend the application,
without prejudice, as follows:

In the Title:

Please delete the title and insert therefor:

- 2 -

-- STRUCTURE OF DIGITAL RIGHTS MANAGEMENT (DRM) SYSTEM --.

In the Specification:

Please delete the section entitled "Cross-Reference to Related Application" on page 1 and insert therefor:

--CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. Patent Application No. 09/290,363, filed April 12, 1999 and entitled "ENFORCEMENT ARCHITECTURE AND METHOD FOR DIGITAL RIGHTS MANAGEMENT", and claims the benefit of U.S. Provisional Application No. 60/126,614, filed March 27, 1998 and entitled "ENFORCEMENT ARCHITECTURE AND METHOD FOR DIGITAL RIGHTS MANAGEMENT", both of which are hereby incorporated by reference.--

In the Claims:

Please cancel claims 1-105 without prejudice.

Please insert new claims 106-163, as follows:

106. A digital rights management (DRM) system operating on a computing device when a user requests that a protected piece of digital content be rendered by the computer device in a particular manner, the system comprising:

- 3 -

a license store for storing one or more digital licenses on the computing device;

a license evaluator for determining whether any licenses stored in the license store correspond to the requested digital content, for determining whether any such corresponding licenses are valid, for reviewing license rules in each such valid license, and for determining based on such reviewed license rules whether such license enables the requesting user to render the requested digital content in the manner sought; and

a state store for maintaining state information corresponding to each license in the license store, the state information being created and updated by the license evaluator as necessary.

107. The DRM system of claim 106 wherein the license evaluator is a trusted component thereof.

108. The DRM system of claim 107 wherein the license evaluator runs in a protected environment on the computing device such that the user is denied access to such license evaluator.

109. The DRM system of claim 106 wherein the license evaluator effectuates acquiring an enabling, valid license if no such enabling, valid license is located and if such enabling, valid license is available.

- 4 -

110. The DRM system of claim 109 wherein the license evaluator refers to license acquisition information attached to the digital content during effectuating acquiring an enabling, valid license, the license acquisition information including data selected from a group consisting of types of licenses available and a network site at which a license server may be accessed.

111. The DRM system of claim 110 wherein the license evaluator exchanges information with the license server during acquisition of an enabling, valid license.

112. The DRM system of claim 110 further comprising a black box for performing encryption and decryption functions as part of the evaluation of any license, the black box having a first unique public / private key pair (PU-BB1, PR-BB1) that is employed as part of the evaluation of any license, wherein the license server refuses to issue a license to the license evaluator if the black box is not current.

113. The DRM system of claim 112 wherein the license evaluator requests a current black box from a black box server, receives the requested black box, and installs the received black box on the computing device, the received black box having a second unique public / private key pair (PU-BB2, PR-BB2) different from the first unique public / private key pair (PU-BB1, PR-BB1).

- 5 -

114. The DRM system of claim 110 wherein the license evaluator receives an enabling, valid license from the license server and stores the received license in the license store.

115. The DRM system of claim 106 wherein in determining whether the license enables the requesting user to render the requested digital content in the manner sought, the license evaluator has access to data on the computing device, such data being selected from a group consisting of:

an identification of the computing device and/or particular aspects thereof;

an identification of the user and/or particular aspects thereof;

an identification of an application to be employed to render the digital content and/or particular aspects thereof;

a system clock; and

combinations thereof.

116. The DRM system of claim 106 further comprising a black box for performing encryption and decryption functions as part of the evaluation of any license.

117. The DRM system of claim 116 wherein the black box is a trusted component thereof.

119. The DRM system of claim 116 wherein the black box works in conjunction with the license evaluator to decrypt / encrypt information as part of the evaluation of any license.

120. The DRM system of claim 116 wherein the license evaluator selects an enabling, valid license and works with the black box to obtain a decryption key (KD) from the selected license, and wherein the black box employs such decryption key (KD) to decrypt the protected digital content.

121. The DRM system of claim 116 wherein the black box decrypts the protected digital content when the license evaluator determines that a license in fact enables the requesting user to render the requested digital content in the manner sought.

122. The DRM system of claim 121 wherein the black box works in conjunction with the license evaluator to decrypt / encrypt information as part of the evaluation of any license, and wherein the black box has a unique public / private key pair (PU-BB, PR-BB) that is employed as part of the evaluation of any license, and that is also employed to obtain a decryption key (KD) for decrypting the protected digital content.

124. The DRM system of claim 123 wherein the license store is a directory of a memory drive.

126. The DRM system of claim 106 wherein the state store is a trusted component thereof.

127. The DRM system of claim 126 wherein the state store runs in a protected environment on the computing device such that the user is denied access to such state store.

128. The DRM system of claim 106 wherein each license in the license store may be removed therefrom, and wherein the state store also maintains state information corresponding to each license formerly in the license store.

- 8 -

129. A computing device having a digital rights management (DRM) system operating thereon when a user requests that a protected piece of digital content be rendered by the computer device in a particular manner, the DRM system comprising:

a license store for storing one or more digital licenses on the computing device;

a license evaluator for determining whether any licenses stored in the license store correspond to the requested digital content, for determining whether any such corresponding licenses are valid, for reviewing license rules in each such valid license, and for determining based on such reviewed license rules whether such license enables the requesting user to render the requested digital content in the manner sought; and

a state store for maintaining state information corresponding to each license in the license store, the state information being created and updated by the license evaluator as necessary.

130. The computing device of claim 129 wherein the license evaluator is a trusted component of the DRM system.

131. The computing device of claim 130 wherein the license evaluator runs in a protected environment thereon such that the user is denied access to such license evaluator.

133. The computing device of claim 132 wherein the license evaluator refers to license acquisition information attached to the digital content during effectuating acquiring an enabling, valid license, the license acquisition information including data selected from a group consisting of types of licenses available and a network site at which a license server may be accessed.

135. The computing device of claim 133 wherein the DRM system further comprises a black box for performing encryption and decryption functions as part of the evaluation of any license, the black box having a first unique public / private key pair (PU-BB1, PR-BB1) that is employed as part of the evaluation of any license, wherein the license server refuses to issue a license to the license evaluator if the black box is not current.

136. The computing device of claim 135 wherein the license evaluator requests a current black box from a black box server, receives the requested black box, and installs the

received black box on the computing device, the received black box having a second unique public / private key pair (PU-BB2, PR-BB2) different from the first unique public / private key pair (PU-BB1, PR-BB1).

137. The computing device of claim 133 wherein the license evaluator receives an enabling, valid license from the license server and stores the received license in the license store.

138. The computing device of claim 129 wherein in determining whether the license enables the requesting user to render the requested digital content in the manner sought, the license evaluator has access to data on the computing device, such data being selected from a group consisting of:

an identification of the computing device and/or particular aspects thereof;

an identification of the user and/or particular aspects thereof;

an identification of an application to be employed to render the digital content and/or particular aspects thereof;

a system clock; and

combinations thereof.

- 11 -

139. The computing device of claim 129 wherein the DRM system further comprises a black box for performing encryption and decryption functions as part of the evaluation of any license.

140. The computing device of claim 139 wherein the black box is a trusted component of the DRM system.

141. The computing device of claim 140 wherein the black box runs in a protected environment thereon such that the user is denied access to such black box.

142. The computing device of claim 139 wherein the black box works in conjunction with the license evaluator to decrypt / encrypt information as part of the evaluation of any license.

143. The computing device of claim 139 wherein the license evaluator selects an enabling, valid license and works with the black box to obtain a decryption key (KD) from the selected license, and wherein the black box employs such decryption key (KD) to decrypt the protected digital content.

- 12 -

144. The computing device of claim 139 wherein the black box decrypts the protected digital content when the license evaluator determines that a license in fact enables the requesting user to render the requested digital content in the manner sought.

145. The computing device of claim 144 wherein the black box works in conjunction with the license evaluator to decrypt / encrypt information as part of the evaluation of any license, and wherein the black box has a unique public / private key pair (PU-BB, PR-BB) that is employed as part of the evaluation of any license, and that is also employed to obtain a decryption key (KD) for decrypting the protected digital content.

146. The computing device of claim 129 wherein the license store is at least a portion of a memory storage device on the computing device.

147. The computing device of claim 146 wherein the license store is a directory of a memory drive.

148. The computing device of claim 147 wherein the memory drive is selected from a group consisting of a soft disk drive, a hard disk drive, and a network drive.

149. The computing device of claim 129 wherein the state store is a trusted component of the DRM system.

DOCKETED TO: 20080510

- 13 -

150. The computing device of claim 149 wherein the state store runs in a protected environment thereon such that the user is denied access to such state store.

151. The computing device of claim 129 wherein each license in the license store may be removed therefrom, and wherein the state store also maintains state information corresponding to each license formerly in the license store.

152. A computer-readable medium having computer-executable instructions stored thereon for operating a digital rights management (DRM) system on a computing device when a user requests that a protected piece of digital content be rendered by the computer device in a particular manner, the instructions performing a method comprising:

storing one or more digital licenses in a license store on the computing device;

determining whether any licenses stored in the license store correspond to the requested digital content;

determining whether any such corresponding licenses are valid;

reviewing license rules in each such valid license;

determining based on such reviewed license rules whether such license enables the requesting user to render the requested digital content in the manner sought; and

maintaining in a state store on the computing device state information corresponding to each license in the license store, the state information being created and updated as necessary.

153. The method of claim 152 further comprising acquiring an enabling, valid license if no such enabling, valid license is located and if such enabling, valid license is available.

154. The method of claim 153 further comprising referring to license acquisition information attached to the digital content to effectuate acquiring an enabling, valid license, the license acquisition information including data selected from a group consisting of types of licenses available and a network site at which a license server may be accessed.

155. The method of claim 154 further comprising exchanging information with the license server during acquisition of an enabling, valid license.

156. The method of claim 154 further comprising performing encryption and decryption functions as part of the evaluation of any license with a black box having a first unique public / private key pair (PU-BB1, PR-BB1) that is employed as part of the evaluation of any license.

- 15 -

157. The method of claim 156 wherein the license server refuses to issue a license to the license evaluator if the black box is not current, and wherein the method comprises:

- requesting a current black box from a black box server;
- receiving the requested black box; and
- installing the received black box on the computing device, the received black box having a second unique public / private key pair (PU-BB2, PR-BB2) different from the first unique public / private key pair (PU-BB1, PR-BB1).

158. The method of claim 152 wherein determining whether the license enables the requesting user to render the requested digital content in the manner sought comprises determining whether the license enables the requesting user to render the requested digital content in the manner sought based on data stored on the computing device, such data being selected from a group consisting of:

- an identification of the computing device and/or particular aspects thereof;
- an identification of the user and/or particular aspects thereof;
- an identification of an application to be employed to render the digital content and/or particular aspects thereof;
- a system clock; and
- combinations thereof.

- 16 -

159. The method of claim 152 further comprising performing encryption and decryption functions as part of the evaluation of any license.

160. The method of claim 159 comprising selecting an enabling, valid license, obtaining a decryption key (KD) from the selected license, and employing such decryption key (KD) to decrypt the protected digital content.

161. The method of claim 159 comprising decrypting the protected digital content upon determining that a license in fact enables the requesting user to render the requested digital content in the manner sought.

162. The method of claim 159 further comprising performing encryption and decryption functions as part of the evaluation of any license with a black box having a unique public / private key pair (PU-BB, PR-BB) that is employed as part of the evaluation of any license.

163. The method of claim 152 wherein each license in the license store may be removed therefrom, the method further comprising maintaining state information in the state store corresponding to each license formerly in the license store.

In the Abstract:

- 17 -

Please delete the Abstract and insert the following:

--A digital rights management (DRM) system operates on a computing device when a user requests that a protected piece of digital content be rendered by the computer device in a particular manner. The DRM system has a license store, a license evaluator, and a state store. The license store stores digital licenses on the computing device. The license evaluator determines whether any licenses stored in the license store correspond to the requested digital content and whether any such corresponding licenses are valid, reviews license rules in each such valid license, and determining based on such reviewed license rules whether such license enables the requesting user to render the requested digital content in the manner sought. The state store maintains state information corresponding to each license in the license store, where the state information is created and updated by the license evaluator as necessary.--

Remarks

Claims 106-163 are pending in the present application as preliminarily amended.

Claims 1-105 have been canceled and claims 106-163 have been added. The title has been canceled and replaced with a new title corresponding to claims 106-163, the specification has been amended to include a new "Cross-Reference to Related Applications" section, and the abstract has been canceled and replaced with a new abstract corresponding to claims 106-163. Applicants respectfully submit that no new matter has been added to the application by the Preliminary Amendment.

- 18 -

Applicants respectfully solicit early examination of the above-identified application, and a Notice of Allowability in due course.

Respectfully submitted,

Steven H. Meyer
Steven H. Meyer

Steven H. Meyer

Registration No. 37,189

Date: **January 13, 2000**

WOODCOCK WASHBURN KURTZ
MACKIEWICZ & NORRIS
One Liberty Place - 46th Floor
Philadelphia, PA 19103
(215) 568-3100

Title of the Invention

Enforcement Architecture and Method for Digital Rights Management

5

Cross-Reference to Related Application

This application claims the benefit of U.S. Provisional Application No. 60/126,614, filed March 27, 1998 under attorney docket number 'MSFT-0063' and entitled "ENFORCEMENT ARCHITECTURE AND METHOD FOR DIGITAL RIGHTS MANAGEMENT".

10

Technical Field

The present invention relates to an architecture for enforcing rights in digital content. More specifically, the present invention relates to such an enforcement architecture that allows access to encrypted digital content only in accordance with parameters specified by license rights acquired by a user of the digital content.

15

Background of the Invention

Digital rights management and enforcement is highly desirable in connection with digital content such as digital audio, digital video, digital text, digital data, digital multimedia, etc., where such digital content is to be distributed to users. Typical modes of distribution include tangible devices such as a magnetic (floppy) disk, a magnetic tape, an optical (compact) disk (CD), etc., and intangible media such as an electronic bulletin board, an electronic network, the Internet, etc. Upon being received by the user, such user renders or 'plays' the digital content with the aid of an appropriate rendering device such as a media player on a personal computer or the like.

20

25

30

Typically, a content owner or rights-owner, such as an author, a publisher, a broadcaster, etc. (hereinafter "content owner"), wishes to distribute such digital content to a user or recipient in exchange for a license fee or some other consideration. Such content owner, given the choice, would likely wish to restrict what the user can do with such distributed digital content. For example, the content owner would like to restrict the user

from copying and re-distributing such content to a second user, at least in a manner that denies the content owner a license fee from such second user.

In addition, the content owner may wish to provide the user with the flexibility to purchase different types of use licenses at different license fees, while at the same time holding the user to the terms of whatever type of license is in fact purchased. For example, the content owner may wish to allow distributed digital content to be played only a limited number of times, only for a certain total time, only on a certain type of machine, only on a certain type of media player, only by a certain type of user, etc.

However, after distribution has occurred, such content owner has very little if any control over the digital content. This is especially problematic in view of the fact that practically every new or recent personal computer includes the software and hardware necessary to make an exact digital copy of such digital content, and to download such exact digital copy to a write-able magnetic or optical disk, or to send such exact digital copy over a network such as the Internet to any destination.

Of course, as part of the legitimate transaction where the license fee was obtained, the content owner may require the user of the digital content to promise not to re-distribute such digital content. However, such a promise is easily made and easily broken. A content owner may attempt to prevent such re-distribution through any of several known security devices, usually involving encryption and decryption. However, there is likely very little that prevents a mildly determined user from decrypting encrypted digital content, saving such digital content in an un-encrypted form, and then re-distributing same.

A need exists, then, for providing an enforcement architecture and method that allows the controlled rendering or playing of arbitrary forms of digital content, where such control is flexible and definable by the content owner of such digital content. A need also exists for providing a controlled rendering environment on a computing device such as a personal computer, where the rendering environment includes at least a portion of such enforcement architecture. Such controlled rendering environment allows that the digital content will only be rendered as specified by the content owner, even though the

digital content is to be rendered on a computing device which is not under the control of the content owner.

Further, a need exists for a trusted component running on the computing device, where the trusted component enforces the rights of the content owner on such computing device in connection with a piece of digital content, even against attempts by the user of such computing device to access such digital content in ways not permitted by the content owner. As but one example, such a trusted software component prevents a user of the computing device from making a copy of such digital content, except as otherwise allowed for by the content owner thereof.

10

Summary of the Invention

The aforementioned needs are satisfied at least in part by an enforcement architecture and method for digital rights management, where the architecture and method enforce rights in protected (secure) digital content available on a medium such as the Internet, an optical disk, etc. For purposes of making content available, the architecture includes a content server from which the digital content is accessible over the Internet or the like in an encrypted form. The content server may also supply the encrypted digital content for recording on an optical disk or the like, wherein the encrypted digital content may be distributed on the optical disk itself. At the content server, the digital content is encrypted using an encryption key, and public / private key techniques are employed to bind the digital content with a digital license at the user's computing device or client machine.

When a user attempts to render the digital content on a computing device, the rendering application invokes a Digital Rights Management (DRM) system on such user's computing device. If the user is attempting to render the digital content for the first time, the DRM system either directs the user to a license server to obtain a license to render such digital content in the manner sought, or transparently obtains such license from such license server without any action necessary on the part of the user. The license includes:

30

- a decryption key (KD) that decrypts the encrypted digital content;

- a description of the rights (play, copy, etc.) conferred by the license and related conditions (begin date, expiration date, number of plays, etc.), where such description is in a digitally readable form; and
- a digital signature that ensures the integrity of the license.

5 The user cannot decrypt and render the encrypted digital content without obtaining such a license from the license server. The obtained license is stored in a license store in the user's computing device.

Importantly, the license server only issues a license to a DRM system that is 'trusted' (i.e., that can authenticate itself). To implement 'trust', the DRM system is
10 equipped with a 'black box' that performs decryption and encryption functions for such DRM system. The black box includes a public / private key pair, a version number and a unique signature, all as provided by an approved certifying authority. The public key is made available to the license server for purposes of encrypting portions of the issued license, thereby binding such license to such black box. The private key is available to the
15 black box only, and not to the user or anyone else, for purposes of decrypting information encrypted with the corresponding public key. The DRM system is initially provided with a black box with a public / private key pair, and the user is prompted to download from a black box server an updated secure black box when the user first requests a license. The black box server provides the updated black box, along with a unique public/private key
20 pair. Such updated black box is written in unique executable code that will run only on the user's computing device, and is re-updated on a regular basis.

When a user requests a license, the client machine sends the black box public key, version number, and signature to the license server, and such license server issues a license only if the version number is current and the signature is valid. A license
25 request also includes an identification of the digital content for which a license is requested and a key ID that identifies the decryption key associated with the requested digital content. The license server uses the black box public key to encrypt the decryption key, and the decryption key to encrypt the license terms, then downloads the encrypted decryption key and encrypted license terms to the user's computing device along with a
30 license signature.

Once the downloaded license has been stored in the DRM system license store, the user can render the digital content according to the rights conferred by the license and specified in the license terms. When a request is made to render the digital content, the black box is caused to decrypt the decryption key and license terms, and a DRM
5 system license evaluator evaluates such license terms. The black box decrypts the encrypted digital content only if the license evaluation results in a decision that the requestor is allowed to play such content. The decrypted content is provided to the rendering application for rendering.

10

Brief Description of the Drawings

The foregoing summary, as well as the following detailed description of the embodiments of the present invention, will be better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, there are shown in the drawings embodiments which are presently preferred. As should be understood,
15 however, the invention is not limited to the precise arrangements and instrumentalities shown. In the drawings:

Fig. 1 is a block diagram showing an enforcement architecture in accordance with one embodiment of the present invention;

Fig. 2 is a block diagram of the authoring tool of the architecture of Fig. 1
20 in accordance with one embodiment of the present invention;

Fig. 3 is a block diagram of a digital content package having digital content for use in connection with the architecture of Fig. 1 in accordance with one embodiment of the present invention;

Fig. 4 is a block diagram of the user's computing device of Fig. 1 in
25 accordance with one embodiment of the present invention;

Figs. 5A and 5B are flow diagrams showing the steps performed in connection with the Digital Rights Management (DRM) system of the computing device of Fig. 4 to render content in accordance with one embodiment of the present invention;

Fig. 6 is a flow diagram showing the steps performed in connection with the DRM system of Fig. 4 to determine whether any valid, enabling licenses are present in accordance with one embodiment of the present invention;

Fig. 7 is a flow diagram showing the steps performed in connection with the
5 DRM system of Fig. 4 to obtain a license in accordance with one embodiment of the present invention;

Fig. 8 is a block diagram of a digital license for use in connection with the architecture of Fig. 1 in accordance with one embodiment of the present invention;

Fig. 9 is a flow diagram showing the steps performed in connection with the
10 DRM system of Fig. 4 to obtain a new black box in accordance with one embodiment of the present invention;

Fig. 10 is a flow diagram showing the key transaction steps performed in connection with the DRM system of Fig. 4 to validate a license and a piece of digital content and render the content in accordance with one embodiment of the present
15 invention;

Fig. 11 is a block diagram showing the license evaluator of Fig. 4 along with a Digital Rights License (DRL) of a license and a language engine for interpreting the DRL in accordance with one embodiment of the present invention; and

Fig. 12 is a block diagram representing a general purpose computer system
20 in which aspects of the present invention and/or portions thereof may be incorporated.

Detailed Description of the Invention

Referring to the drawings in details, wherein like numerals are used to indicate like elements throughout, there is shown in Fig. 1 an enforcement architecture 10
25 in accordance with one embodiment of the present invention. Overall, the enforcement architecture 10 allows an owner of digital content 12 to specify license rules that must be satisfied before such digital content 12 is allowed to be rendered on a user's computing device 14. Such license rules are embodied within a digital license 16 that the user / user's computing device 14 (hereinafter, such terms are interchangeable unless circumstances
30 require otherwise) must obtain from the content owner or an agent thereof. The digital

content 12 is distributed in an encrypted form, and may be distributed freely and widely. Preferably, the decrypting key (KD) for decrypting the digital content 12 is included with the license 16.

5 COMPUTER ENVIRONMENT

Fig. 12 and the following discussion are intended to provide a brief general description of a suitable computing environment in which the present invention and/or portions thereof may be implemented. Although not required, the invention is described in the general context of computer-executable instructions, such as program modules, being
10 executed by a computer, such as a client workstation or a server. Generally, program modules include routines, programs, objects, components, data structures and the like that perform particular tasks or implement particular abstract data types. Moreover, it should be appreciated that the invention and/or portions thereof may be practiced with other computer system configurations, including hand-held devices, multi-processor systems,
15 microprocessor-based or programmable consumer electronics, network PCs, minicomputers, mainframe computers and the like. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage
20 devices.

As shown in Fig. 12, an exemplary general purpose computing system includes a conventional personal computer 120 or the like, including a processing unit 121, a system memory 122, and a system bus 123 that couples various system components including the system memory to the processing unit 121. The system bus 123 may be any
25 of several types of bus structures including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. The system memory includes read-only memory (ROM) 124 and random access memory (RAM) 125. A basic input/output system 126 (BIOS), containing the basic routines that help to transfer information between elements within the personal computer 120, such as during start-up,
30 is stored in ROM 124.

The personal computer 120 may further include a hard disk drive 127 for reading from and writing to a hard disk (not shown), a magnetic disk drive 128 for reading from or writing to a removable magnetic disk 129, and an optical disk drive 130 for reading from or writing to a removable optical disk 131 such as a CD-ROM or other optical media. The hard disk drive 127, magnetic disk drive 128, and optical disk drive 130 are connected to the system bus 123 by a hard disk drive interface 132, a magnetic disk drive interface 133, and an optical drive interface 134, respectively. The drives and their associated computer-readable media provide non-volatile storage of computer readable instructions, data structures, program modules and other data for the personal computer 20.

Although the exemplary environment described herein employs a hard disk, a removable magnetic disk 129, and a removable optical disk 131, it should be appreciated that other types of computer readable media which can store data that is accessible by a computer may also be used in the exemplary operating environment. Such other types of media include a magnetic cassette, a flash memory card, a digital video disk, a Bernoulli cartridge, a random access memory (RAM), a read-only memory (ROM), and the like.

A number of program modules may be stored on the hard disk, magnetic disk 129, optical disk 131, ROM 124 or RAM 125, including an operating system 135, one or more application programs 136, other program modules 137 and program data 138. A user may enter commands and information into the personal computer 120 through input devices such as a keyboard 140 and pointing device 142. Other input devices (not shown) may include a microphone, joystick, game pad, satellite disk, scanner, or the like. These and other input devices are often connected to the processing unit 121 through a serial port interface 146 that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, game port, or universal serial bus (USB). A monitor 147 or other type of display device is also connected to the system bus 123 via an interface, such as a video adapter 148. In addition to the monitor 147, a personal computer typically includes other peripheral output devices (not shown), such as speakers and printers. The exemplary system of Fig. 12 also includes a host adapter 155, a Small Computer System Interface (SCSI) bus 156, and an external storage device 162 connected to the SCSI bus 156.

The personal computer 120 may operate in a networked environment using logical connections to one or more remote computers, such as a remote computer 149. The remote computer 149 may be another personal computer, a server, a router, a network PC, a peer device or other common network node, and typically includes many or all of the elements described above relative to the personal computer 120, although only a memory storage device 150 has been illustrated in Fig. 12. The logical connections depicted in Fig. 12 include a local area network (LAN) 151 and a wide area network (WAN) 152. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets, and the Internet.

When used in a LAN networking environment, the personal computer 120 is connected to the LAN 151 through a network interface or adapter 153. When used in a WAN networking environment, the personal computer 120 typically includes a modem 154 or other means for establishing communications over the wide area network 152, such as the Internet. The modem 154, which may be internal or external, is connected to the system bus 123 via the serial port interface 146. In a networked environment, program modules depicted relative to the personal computer 120, or portions thereof, may be stored in the remote memory storage device. It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

ARCHITECTURE

Referring again to Fig. 1, in one embodiment of the present invention, the architecture 10 includes an authoring tool 18, a content-key database 20, a content server 22, a license server 24, and a black box server 26, as well as the aforementioned user's computing device 14.

ARCHITECTURE - Authoring Tool 18

The authoring tool 18 is employed by a content owner to package a piece of digital content 12 into a form that is amenable for use in connection with the architecture 10 of the present invention. In particular, the content owner provides the authoring tool 18

with the digital content 12, instructions and/or rules that are to accompany the digital content 12, and instructions and/or rules as to how the digital content 12 is to be packaged.

The authoring tool 18 then produces a digital content package 12p having the digital content 12 encrypted according to an encryption / decryption key, and the instructions
5 and/or rules that accompany the digital content 12.

In one embodiment of the present invention, the authoring tool 18 is instructed to serially produce several different digital content 12 packages 12p, each having the same digital content 12 encrypted according to a different encryption / decryption key. As should be understood, having several different packages 12p with the
10 same digital content 12 may be useful for tracking the distribution of such packages 12p / content 12 (hereinafter simply "digital content 12"; unless circumstances require otherwise). Such distribution tracking is not ordinarily necessary, but may be used by an investigative authority in cases where the digital content 12 has been illegally sold or broadcast.

In one embodiment of the present invention, the encryption / decryption key that encrypts the digital content 12 is a symmetric key, in that the encryption key is also the decryption key (KD). As will be discussed below in more detail, such decryption key (KD) is delivered to a user's computing device 14 in a hidden form as part of a license 16 for such digital content 12. Preferably, each piece of digital content 12 is provided with a
20 content ID (or each package 12p is provided with a package ID), each decryption key (KD) has a key ID, and the authoring tool 18 causes the decryption key (KD), key ID, and content ID (or package ID) for each piece of digital content 12 (or each package 12p) to be stored in the content-key database 20. In addition, license data regarding the types of licenses 16 to be issued for the digital content 12 and the terms and conditions for each
25 type of license 16 may be stored in the content-key database 20, or else in another database (not shown). Preferably, the license data can be modified by the content owner at a later time as circumstances and market conditions may require.

In use, the authoring tool 18 is supplied with information including, among other things:

30 - the digital content 12 to be packaged;

- | Variable | Mean | Standard deviation | Minimum | Maximum |
|---------------------------|------|--------------------|---------|---------|
| Age | 34.5 | 10.5 | 20 | 55 |
| Gender | 0.5 | 0.5 | 0 | 1 |
| Marital status | 0.5 | 0.5 | 0 | 1 |
| Education | 12.5 | 1.5 | 10 | 15 |
| Income | 15.5 | 5.5 | 10 | 25 |
| Health status | 1.5 | 0.5 | 1 | 2 |
| Life satisfaction | 4.5 | 1.5 | 3 | 6 |
| Work satisfaction | 3.5 | 1.5 | 2 | 5 |
| Family satisfaction | 4.5 | 1.5 | 3 | 6 |
| Community satisfaction | 3.5 | 1.5 | 2 | 5 |
| Overall life satisfaction | 4.5 | 1.5 | 3 | 6 |

Variable	Mean	Standard deviation	Minimum	Maximum
Age	34.5	10.5	20	55
Gender	0.5	0.5	0	1
Marital status	0.5	0.5	0	1
Education	12.5	1.5	10	15
Income	15.5	5.5	10	25
Health status	1.5	0.5	1	2
Life satisfaction	4.5	1.5	3	6
Work satisfaction	3.5	1.5	2	5
Family satisfaction	4.5	1.5	3	6
Community satisfaction	3.5	1.5	2	5
Overall life satisfaction	4.5	1.5	3	6

Variable	Mean	Standard deviation	Minimum	Maximum
Age	34.5	10.5	20	55
Gender	0.5	0.5	0	1
Marital status	0.5	0.5	0	1
Education	12.5	1.5	10	15
Income	15.5	5.5	10	25
Health status	1.5	0.5	1	2
Life satisfaction	4.5	1.5	3	6
Work satisfaction	3.5	1.5	2	5
Family satisfaction	4.5	1.5	3	6
Community satisfaction	3.5	1.5	2	5
Overall satisfaction	3.5	1.5	2	5

Variable	Mean	Standard deviation	Minimum	Maximum
Age	34.5	10.5	20	55
Gender	0.5	0.5	0	1
Marital status	0.5	0.5	0	1
Education	12.5	1.5	10	15
Income	15.5	5.5	10	25
Health status	1.5	0.5	1	2
Life satisfaction	4.5	1.5	3	6
Work satisfaction	3.5	1.5	2	5
Family satisfaction	4.5	1.5	3	6
Community satisfaction	3.5	1.5	2	5
Overall life satisfaction	4.5	1.5	3	6

Variable	Mean	Standard deviation	Minimum	Maximum
Age	34.5	10.5	20	55
Gender	0.5	0.5	0	1
Marital status	0.5	0.5	0	1
Education	12.5	1.5	10	15
Income	15.5	5.5	10	25
Health status	1.5	0.5	1	2
Life satisfaction	4.5	1.5	3	6
Work satisfaction	3.5	1.5	2	5
Family satisfaction	4.5	1.5	3	6
Community satisfaction	3.5	1.5	2	5
Overall life satisfaction	4.5	1.5	3	6

be stored on the content server 22 for distribution to the world.

In one embodiment of the present invention, and referring now to Fig. 2, the authoring tool 18 is a dynamic authoring tool 18 that receives input parameters which can be specified and operated on. Accordingly, such authoring tool 18 can rapidly produce
5 multiple variations of package 12p for multiple pieces of digital content 12. Preferably, the input parameters are embodied in the form of a dictionary 28, as shown, where the dictionary 28 includes such parameters as:

- the name of the input file 29a having the digital content 12;
- the type of encoding that is to take place
- 10 - the encryption / decryption key (KD) to be employed,
- the accompanying instructions / rules / information ('header information') to be packaged with the digital content 12 in the package 12p.
- the type of muxing that is to occur; and
- the name of the output file 29b to which the package 12p based on the
15 digital content 12 is to be written.

As should be understood, such dictionary 28 is easily and quickly modifiable by an operator of the authoring tool 18 (human or machine), and therefore the type of authoring performed by the authoring tool 18 is likewise easily and quickly modifiable in a dynamic manner. In one embodiment of the present invention, the
20 authoring tool 18 includes an operator interface (not shown) displayable on a computer screen to a human operator. Accordingly, such operator may modify the dictionary 28 by way of the interface, and further may be appropriately aided and/or restricted in modifying the dictionary 28 by way of the interface.

In the authoring tool 18, and as seen in Fig. 2, a source filter 18a receives
25 the name of the input file 29a having the digital content 12 from the dictionary 28, and retrieves such digital content 12 from such input file and places the digital content 12 into a memory 29c such as a RAM or the like. An encoding filter 18b then performs encoding on the digital content 12 in the memory 29c to transfer the file from the input format to the output format according to the type of encoding specified in the dictionary 28 (i.e., .wav to
30 .asp, .mp3 to .asp, etc.), and places the encoded digital content 12 in the memory 29c. As

shown, the digital content 12 to be packaged (music, e.g.) is received in a compressed format such as the .wav or .mp3 format, and is transformed into a format such as the .asp (active streaming protocol) format. Of course, other input and output formats may be employed without departing from the spirit and scope of the present invention.

5 Thereafter, an encryption filter 18c encrypts the encoded digital content 12 in the memory 29c according to the encryption / decryption key (KD) specified in the dictionary 28, and places the encrypted digital content 12 in the memory 29c. A header filter 18d then adds the header information specified in the dictionary 28 to the encrypted digital content 12 in the memory 29c.

10 As should be understood, depending on the situation, the package 12p may include multiple streams of temporally aligned digital content 12 (one stream being shown in Fig. 2), where such multiple streams are multiplexed (i.e., 'muxed'). Accordingly, a mux filter 18e performs muxing on the header information and encrypted digital content 12 in the memory 29c according to the type of muxing specified in the dictionary 28, and
15 places the result in the memory 29c. A file writer filter 18f then retrieves the result from the memory 29c and writes such result to the output file 29b specified in the dictionary 28 as the package 12p.

 It should be noted that in certain circumstances, the type of encoding to be performed will not normally change. Since the type of muxing typically is based on the
20 type of encoding, it is likewise the case that the type of muxing will not normally change, either. If this is in fact the case, the dictionary 28 need not include parameters on the type of encoding and/or the type of muxing. Instead, it is only necessary that the type of encoding be 'hardwired' into the encoding filter and/or that the type of muxing be
 'hardwired' into the mux filter. Of course, as circumstance require, the authoring tool 18
25 may not include all of the aforementioned filters, or may include other filters, and any included filter may be hardwired or may perform its function according to parameters specified in the dictionary 28, all without departing from the spirit and scope of the present invention.

 Preferably, the authoring tool 18 is implemented on an appropriate
30 computer, processor, or other computing machine by way of appropriate software. The

structure and operation of such machine and such software should be apparent based on the disclosure herein and therefore do not require any detailed discussion in the present disclosure.

5 **ARCHITECTURE - Content Server 22**

Referring again to Fig. 1, in one embodiment of the present invention, the content server 22 distributes or otherwise makes available for retrieval the packages 12p produced by the authoring tool 18. Such packages 12p may be distributed as requested by the content server 22 by way of any appropriate distribution channel without departing
10 from the spirit and scope of the present invention. For example, such distribution channel may be the Internet or another network, an electronic bulletin board, electronic mail, or the like. In addition, the content server 22 may be employed to copy the packages 12p onto magnetic or optical disks or other storage devices, and such storage devices may then be distributed.

15 It will be appreciated that the content server 22 distributes packages 12p without regard to any trust or security issues. As discussed below, such issues are dealt with in connection with the license server 24 and the relationship between such license server 24 and the user's computing device 14. In one embodiment of the present invention, the content server 22 freely releases and distributes packages 12p having digital
20 content 12 to any distributee requesting same. However, the content server 22 may also release and distribute such packages 12p in a restricted manner without departing from the spirit and scope of the present invention. For example, the content server 22 may first require payment of a pre-determined distribution fee prior to distribution, or may require that a distributee identify itself, or may indeed make a determination of whether
25 distribution is to occur based on an identification of the distributee.

In addition, the content server 22 may be employed to perform inventory management by controlling the authoring tool 18 to generate a number of different packages 12p in advance to meet an anticipated demand. For example, the server could generate 100 packages 12p based on the same digital content 12, and serve each package
30 12p 10 times. As supplies of packages 12p dwindle to 20, for example, the content server

22 may then direct the authoring tool 18 to generate 80 additional packages 12p, again for example.

Preferably, the content server 22 in the architecture 10 has a unique public / private key pair (PU-CS, PR-CS) that is employed as part of the process of evaluating a license 16 and obtaining a decryption key (KD) for decrypting corresponding digital content 12, as will be explained in more detail below. As is known, a public / private key pair is an asymmetric key, in that what is encrypted in one of the keys in the key pair can only be decrypted by the other of the keys in the key pair. In a public / private key pair encryption system, the public key may be made known to the world, but the private key should always be held in confidence by the owner of such private key. Accordingly, if the content server 22 encrypts data with its private key (PR-CS), it can send the encrypted data out into the world with its public key (PU-CS) for decryption purposes. Correspondingly, if an external device wants to send data to the content server 22 so that only such content server 22 can decrypt such data, such external device must first obtain the public key of the content server 22 (PU-CS) and then must encrypt the data with such public key. Accordingly, the content server 22 (and only the content server 22) can then employ its private key (PR-CS) to decrypt such encrypted data.

As with the authoring tool 18, the content server 22 is implemented on an appropriate computer, processor, or other computing machine by way of appropriate software. The structure and operation of such machine and such software should be apparent based on the disclosure herein and therefore do not require any detailed discussion in the present disclosure. Moreover, in one embodiment of the present invention, the authoring tool 18 and the content server 22 may reside on a single computer, processor, or other computing machine, each in a separate work space. It should be recognized, moreover, that the content server 22 may in certain circumstances include the authoring tool 18 and/or perform the functions of the authoring tool 18, as discussed above.

Structure of Digital Content Package 12p

Referring now to Fig. 3, in one embodiment of the present invention, the

digital content package 12p as distributed by the content server 22 includes:

- the digital content 12 encrypted with the encryption / decryption key (KD), as was discussed above (i.e., (KD(CONTENT)));
- the content ID (or package ID) of such digital content 12 (or package 12p);
- the key ID of the decryption key (KD);
- license acquisition information, preferably in an un-encrypted form; and
- the key KD encrypting the content server 22 public key (PU-CS), signed by the content server 22 private key (PR-CS) (i.e., (KD (PU-CS) S (PR-CS))).

With regard to (KD (PU-CS) S (PR-CS)), it is to be understood that such item is to be used in connection with validating the digital content 12 and/or package 12p, as will be explained below. Unlike a certificate with a digital signature (see below), the key (PU-CS) is not necessary to get at (KD (PU-CS)). Instead, the key (PU-CS) is obtained merely by applying the decryption key (KD). Once so obtained, such key (PU-CS) may be employed to test the validity of the signature (S (PR-CS)).

It should also be understood that for such package 12p to be constructed by the authoring tool 18, such authoring tool 18 must already possess the license acquisition information and (KD (PU-CS) S (PR-CS)), presumably as header information supplied by the dictionary 28. Moreover, the authoring tool 18 and the content server 22 must presumably interact to construct (KD (PU-CS) S (PR-CS)). Such interaction may for example include the steps of:

- the content server 22 sending (PU-CS) to the authoring tool 18;
- the authoring tool 18 encrypting (PU-CS) with (KD) to produce (KD (PU-CS));
- the authoring tool 18 sending (KD (PU-CS)) to the content server 22;
- the content server 22 signing (KD (PU-CS)) with (PR-CS) to produce (KD (PU-CS) S (PR-CS)); and
- the content server 22 sending (KD (PU-CS) S (PR-CS)) to the authoring tool 18.

ARCHITECTURE - License Server 24

Referring again to Fig. 1, in one embodiment of the present invention, the license server 24 performs the functions of receiving a request for a license 16 from a user's computing device 14 in connection with a piece of digital content 12, determining whether the user's computing device 14 can be trusted to honor an issued license 16, negotiating such a license 16, constructing such license 16, and transmitting such license 16 to the user's computing device 14. Preferably, such transmitted license 16 includes the decryption key (KD) for decrypting the digital content 12. Such license server 24 and such functions will be explained in more detail below. Preferably, and like the content server 22, the license server 24 in the architecture 10 has a unique public / private key pair (PU-LS, PR-LS) that is employed as part of the process of evaluating a license 16 and obtaining a decryption key (KD) for decrypting corresponding digital content 12, as will be explained in more detail below.

As with the authoring tool 18 and the content server 22, the license server 24 is implemented on an appropriate computer, processor, or other computing machine by way of appropriate software. The structure and operation of such machine and such software should be apparent based on the disclosure herein and therefore do not require any detailed discussion in the present disclosure. Moreover, in one embodiment of the present invention the authoring tool 18 and/or the content server 22 may reside on a single computer, processor, or other computing machine together with the license server 24, each in a separate work space.

In one embodiment of the present invention, prior to issuance of a license 16, the license server 24 and the content server 22 enter into an agency agreement or the like, wherein the license server 24 in effect agrees to be the licensing authority for at least a portion of the digital content 12 distributed by the content server 22. As should be understood, one content server 22 may enter into an agency agreement or the like with several license servers 24, and/or one license server 24 may enter into an agency agreement or the like with several content servers 22, all without departing from the spirit and scope of the present invention.

Preferably, the license server 24 can show to the world that it does in fact have the authority to issue a license 16 for digital content 12 distributed by the content server 22. To do so, it is preferable that the license server 24 send to the content server 22 the license server 24 public key (PU-LS), and that the content server 22 then send to the
5 license server 24 a digital certificate containing PU-LS as the contents signed by the content server 22 private key (CERT (PU-LS) S (PR-CS)). As should be understood, the contents (PU-LS) in such certificate can only be accessed with the content server 22 public key (PU-CS). As should also be understood, in general, a digital signature of underlying data is an encrypted form of such data, and will not match such data when decrypted if
10 such data has been adulterated or otherwise modified.

As a licensing authority in connection with a piece of digital content 12, and as part of the licensing function, the license server 24 must have access to the decryption key (KD) for such digital content 12. Accordingly, it is preferable that license server 24 have access to the content-key database 20 that has the decryption key (KD), key
15 ID, and content ID (or package ID) for such digital content 12 (or package 12p).

ARCHITECTURE - Black Box Server 26

Still referring to Fig. 1, in one embodiment of the present invention, the black box server 26 performs the functions of installing and/or upgrading a new black box
20 30 in a user's computing device 14. As will be explained in more detail below, the black box 30 performs encryption and decryption functions for the user's computing device 14. As will also be explained in more detail below, the black box 30 is intended to be secure and protected from attack. Such security and protection is provided, at least in part, by upgrading the black box 30 to a new version as necessary by way of the black box server
25 26, as will be explained in more detail below.

As with the authoring tool 18, the content server 22, and the license server 24, the black box server 26 is implemented on an appropriate computer, processor, or other computing machine by way of appropriate software. The structure and operation of such machine and such software should be apparent based on the disclosure herein and therefore
30 do not require any detailed discussion in the present disclosure. Moreover, in one

embodiment of the present invention the license server 24, the authoring tool 18, and/or the content server 22 may reside on a single computer, processor, or other computing machine together with the black box server 26, each in a separate work space. Note, though, that for security purposes, it may be wise to have the black box server 26 on a
5 separate machine.

ARCHITECTURE - User's Computing Device 14

Referring now to Fig. 4, in one embodiment of the present invention, the user's computing device 14 is a personal computer or the like, having elements including a
10 keyboard, a mouse, a screen, a processor, RAM, ROM, a hard drive, a floppy drive, a CD player, and/or the like. However, the user's computing device 14 may also be a dedicated viewing device such as a television or monitor, a dedicated audio device such as a stereo or other music player, a dedicated printer, or the like, among other things, all without departing from the spirit and scope of the present invention.

15 The content owner for a piece of digital content 12 must trust that the user's computing device 14 will abide by the rules specified by such content owner, i.e. that the digital content 12 will not be rendered unless the user obtains a license 16 that permits the rendering in the manner sought. Preferably, then, the user's computing device 14 must provide a trusted component or mechanism 32 that can satisfy to the content owner that
20 such computing device 14 will not render the digital content 12 except according to the license rules embodied in the license 16 associated with the digital content 12 and obtained by the user.

Here, the trusted mechanism 32 is a Digital Rights Management (DRM) system 32 that is enabled when a user requests that a piece of digital content 12 be
25 rendered, that determines whether the user has a license 16 to render the digital content 12 in the manner sought, that effectuates obtaining such a license 16 if necessary, that determines whether the user has the right to play the digital content 12 according to the license 16, and that decrypts the digital content 12 for rendering purposes if in fact the user has such right according to such license 16. The contents and function of the DRM system
30 32 on the user's computing device 14 and in connection with the architecture 10 are

described below.

DRM SYSTEM 32

5 The DRM system 32 performs four main functions with the architecture 10 disclosed herein: (1) content acquisition, (2) license acquisition, (3) content rendering, and (4) black box 30 installation / update. Preferably, any of the functions can be performed at any time, although it is recognized that some of the functions already require that digital content 12 be acquired.

10 DRM SYSTEM 32 - Content Acquisition

Acquisition of digital content 12 by a user and/or the user's computing device 14 is typically a relatively straight-forward matter and generally involves placing a file having encrypted digital content 12 on the user's computing device 14. Of course, to work with the architecture 10 and the DRM system 32 disclosed herein, it is necessary that
15 the encrypted digital content 12 be in a form that is amenable to such architecture 10 and DRM system 32, such as the digital package 12p as will be described below.

As should be understood, the digital content 12 may be obtained in any manner from a content server 22, either directly or indirectly, without departing from the spirit and scope of the present invention. For example, such digital content 12 may be
20 downloaded from a network such as the Internet, located on an obtained optical or magnetic disk or the like, received as part of an E-mail message or the like, or downloaded from an electronic bulletin board or the like.

Such digital content 12, once obtained, is preferably stored in a manner such that the obtained digital content 12 is accessible by a rendering application 34 (to be
25 described below) running on the computing device 14, and by the DRM system 32. For example, the digital content 12 may be placed as a file on a hard drive (not shown) of the user's computing device 14, or on a network server (not shown) accessible to the computing device 14. In the case where the digital content 12 is obtained on an optical or magnetic disk or the like, it may only be necessary that such disk be present in an
30 appropriate drive (not shown) coupled to the user's computing device 14.

In the present invention, it is not envisioned that any special tools are necessary to acquire digital content 12, either from the content server 22 as a direct distribution source or from some intermediary as an indirect distribution source. That is, it is preferable that digital content 12 be as easily acquired as any other data file. However, the DRM system 32 and/or the rendering application 34 may include an interface (not shown) designed to assist the user in obtaining digital content 12. For example, the interface may include a web browser especially designed to search for digital content 12, links to pre-defined Internet web sites that are known to be sources of digital content 12, and the like.

DRM SYSTEM 32 - Content Rendering, Part 1

Referring now to Fig. 5A, in one embodiment of the present invention, assuming the encrypted digital content 12 has been distributed to and received by a user and placed by the user on the computing device 14 in the form of a stored file, the user will attempt to render the digital content 12 by executing some variation on a render command (step 501). For example, such render command may be embodied as a request to 'play' or 'open' the digital content 12. In some computing environments, such as for example the "MICROSOFT WINDOWS" operating system, distributed by MICROSOFT Corporation of Redmond, Washington, such play or open command may be as simple as 'clicking' on an icon representative of the digital content 12. Of course, other embodiments of such render command may be employed without departing from the spirit and scope of the present invention. In general, such render command may be considered to be executed whenever a user directs that a file having digital content 12 be opened, run, executed, and/or the like.

Importantly, and in addition, such render command may be embodied as a request to copy the digital content 12 to another form, such as to a printed form, a visual form, an audio form, etc. As should be understood, the same digital content 12 may be rendered in one form, such as on a computer screen, and then in another form, such as a printed document. In the present invention, each type of rendering is performed only if the user has the right to do so, as will be explained below.

In one embodiment of the present invention, the digital content 12 is in the form of a digital file having a file name ending with an extension, and the computing device 14 can determine based on such extension to start a particular kind of rendering application 34. For example, if the file name extension indicates that the digital content 12 is a text file, the rendering application 34 is some form of word processor such as the "MICROSOFT WORD", distributed by MICROSOFT Corporation of Redmond, Washington. Likewise, if the file name extension indicates that the digital content 12 is an audio, video, and/or multimedia file, the rendering application 34 is some form of multimedia player, such as "MICROSOFT MEDIA PLAYER", also distributed by MICROSOFT Corporation of Redmond, Washington.

Of course, other methods of determining a rendering application may be employed without departing from the spirit and scope of the present invention. As but one example, the digital content 12 may contain meta-data in an un-encrypted form (i.e., the aforementioned header information), where the meta-data includes information on the type of rendering application 34 necessary to render such digital content 12.

Preferably, such rendering application 34 examines the digital content 12 associated with the file name and determines whether such digital content 12 is encrypted in a rights-protected form (steps 503, 505). If not protected, the digital content 12 may be rendered without further ado (step 507). If protected, the rendering application 34 determines from the encrypted digital content 12 that the DRM system 32 is necessary to play such digital content 12. Accordingly, such rendering application 34 directs the user's computing device 14 to run the DRM system 32 thereon (step 509). Such rendering application 34 then calls such DRM system 32 to decrypt the digital content 12 (step 511).

As will be discussed in more detail below, the DRM system 32 in fact decrypts the digital content 12 only if the user has a valid license 16 for such digital content 12 and the right to play the digital content 12 according to the license rules in the valid license 16.

Preferably, once the DRM system 32 has been called by the rendering application 34, such DRM system 32 assumes control from the rendering application 34, at least for purposes of determining whether the user has a right to play such digital content 12 (step 513).

DRM System 32 Components

In one embodiment of the present invention, and referring again to Fig. 4, the DRM system 32 includes a license evaluator 36, the black box 30, a license store 38, and a state store 40.

5

DRM System 32 Components - License Evaluator 36

The license evaluator 36 locates one or more licenses 16 that correspond to the requested digital content 12, determines whether such licenses 16 are valid, reviews the license rules in such valid licenses 16, and determines based on the reviewed license rules whether the requesting user has the right to render the requested digital content 12 in the manner sought, among other things. As should be understood, the license evaluator 36 is a trusted component in the DRM system 32. In the present disclosure, to be 'trusted' means that the license server 24 (or any other trusting element) is satisfied that the trusted element will carry out the wishes of the owner of the digital content 12 according to the rights description in the license 16, and that a user cannot easily alter such trusted element for any purpose, nefarious or otherwise.

10
15

The license evaluator 36 has to be trusted in order to ensure that such license evaluator 36 will in fact evaluate a license 16 properly, and to ensure that such license evaluator 36 has not been adulterated or otherwise modified by a user for the purpose of bypassing actual evaluation of a license 16. Accordingly, the license evaluator 36 is run in a protected or shrouded environment such that the user is denied access to such license evaluator 36. Other protective measures may of course be employed in connection with the license evaluator 36 without departing from the spirit and scope of the present invention.

20
25**DRM System 32 Components - Black Box 30**

Primarily, and as was discussed above, the black box 30 performs encryption and decryption functions in the DRM system 32. In particular, the black box 30 works in conjunction with the license evaluator 36 to decrypt and encrypt certain information as part of the license evaluation function. In addition, once the license

30

evaluator 36 determines that a user does in fact have the right to render the requested digital content 12 in the manner sought, the black box 30 is provided with a decryption key (KD) for such digital content 12, and performs the function of decrypting such digital content 12 based on such decryption key (KD).

- 5 The black box 30 is also a trusted component in the DRM system 32. In particular, the license server 24 must trust that the black box 30 will perform the decryption function only in accordance with the license rules in the license 16, and also trust that such black box 30 will not operate should it become adulterated or otherwise modified by a user for the nefarious purpose of bypassing actual evaluation of a license 16.
- 10 Accordingly, the black box 30 is also run in a protected or shrouded environment such that the user is denied access to such black box 30. Again, other protective measures may be employed in connection with the black box 30 without departing from the spirit and scope of the present invention. Preferably, and like the content server 22 and license
- 15 server 24, the black box 30 in the DRM system 32 has a unique public / private key pair (PU-BB, PR-BB) that is employed as part of the process of evaluating the license 16 and obtaining a decryption key (KD) for decrypting the digital content 12, as will be described in more detail below.

DRM System 32 Components - License Store 38

- 20 The license store 38 stores licenses 16 received by the DRM system 32 for corresponding digital content 12. The license store 38 itself need not be trusted since the license store 38 merely stores licenses 16, each of which already has trust components built thereinto, as will be described below. In one embodiment of the present invention, the license store 38 is merely a sub-directory of a drive such as a hard disk drive or a
- 25 network drive. However, the license store 38 may be embodied in any other form without departing from the spirit and scope of the present invention, so long as such license store 38 performs the function of storing licenses 16 in a location relatively convenient to the DRM system 32.

- 30 **DRM System 32 Components - State Store 40**

The state store 40 performs the function of maintaining state information corresponding to licenses 16 presently or formerly in the license store 38. Such state information is created by the DRM system 32 and stored in the state store 40 as necessary. For example, if a particular license 16 only allows a pre-determined number of renderings of a piece of corresponding digital content 12, the state store 40 maintains state information on how many renderings have in fact taken place in connection with such license 16. The state store 40 continues to maintain state information on licenses 16 that are no longer in the license store 38 to avoid the situation where it would otherwise be advantageous to delete a license 16 from the license store 38 and then obtain an identical license 16 in an attempt to delete the corresponding state information from the state store 40.

The state store 40 also has to be trusted in order to ensure that the information stored therein is not reset to a state more favorable to a user. Accordingly, the state store 40 is likewise run in a protected or shrouded environment such that the user is denied access to such state store 40. Once again, other protective measures may of course be employed in connection with the state store 40 without departing from the spirit and scope of the present invention. For example, the state store 40 may be stored by the DRM system 32 on the computing device 14 in an encrypted form.

20 DRM SYSTEM 32 - Content Rendering, Part 2

Referring again to Fig. 5A, and again discussing content rendering in one embodiment of the present invention, once the DRM system 32 has assumed control from the calling rendering application 34, such DRM system 32 then begins the process of determining whether the user has a right to render the requested digital content 12 in the manner sought. In particular, the DRM system 32 either locates a valid, enabling license 16 in the license store (steps 515, 517) or attempts to acquire a valid, enabling license 16 from the license server 24 (i.e. performs the license acquisition function as discussed below and as shown in Fig. 7).

As a first step, and referring now to Fig. 6, the license evaluator 36 of such DRM system 32 checks the license store 38 for the presence of one or more received

licenses 16 that correspond to the digital content 12 (step 601). Typically, the license 16 is in the form of a digital file, as will be discussed below, although it will be recognized that the license 16 may also be in other forms without departing from the spirit and scope of the present invention. Typically, the user will receive the digital content 12 without such
5 license 16, although it will likewise be recognized that the digital content 12 may be received with a corresponding license 16 without departing from the spirit and scope of the present invention.

As was discussed above in connection with Fig. 3, each piece of digital content 12 is in a package 12p with a content ID (or package ID) identifying such digital
10 content 12 (or package 12p), and a key ID identifying the decryption key (KD) that will decrypt the encrypted digital content 12. Preferably, the content ID (or package ID) and the key ID are in an un-encrypted form. Accordingly, and in particular, based on the content ID of the digital content 12, the license evaluator 36 looks for any license 16 in the license store 38 that contains an identification of applicability to such content ID. Note
15 that multiple such licenses 16 may be found, especially if the owner of the digital content 12 has specified several different kinds of licenses 16 for such digital content 12, and the user has obtained multiple ones of such licenses 16. If in fact the license evaluator 36 does not find in the license store 38 any license 16 corresponding to the requested digital content 12, the DRM system 32 may then perform the function of license acquisition (step
20 519 of Fig. 5), to be described below.

Assume now that the DRM system 32 has been requested to render a piece of digital content 12, and one or more licenses 16 corresponding thereto are present in the license store 38. In one embodiment of the present invention, then, the license evaluator 36 of the DRM system 32 proceeds to determine for each such license 16 whether such
25 license 16 itself is valid (steps 603 and 605 of Fig. 6). Preferably, and in particular, each license 16 includes a digital signature 26 based on the content 28 of the license 16. As should be understood, the digital signature 26 will not match the license 16 if the content 28 has been adulterated or otherwise modified. Thus, the license evaluator 36 can determine based on the digital signature 26 whether the content 28 is in the form that it
30 was received from the license server 24 (i.e., is valid). If no valid license 16 is found in

the license store 38, the DRM system 32 may then perform the license acquisition function described below to obtain such a valid license 16.

Assuming that one or more valid licenses 16 are found, for each valid license 16, the license evaluator 36 of the DRM system 32 next determines whether such valid license 16 gives the user the right to render the corresponding digital content 12 in the manner desired (i.e., is enabling) (steps 607 and 609). In particular, the license evaluator 36 determines whether the requesting user has the right to play the requested digital content 12 based on the rights description in each license 16 and based on what the user is attempting to do with the digital content 12. For example, such rights description may allow the user to render the digital content 12 into a sound, but not into a decrypted digital copy.

As should be understood, the rights description in each license 16 specifies whether the user has rights to play the digital content 12 based on any of several factors, including who the user is, where the user is located, what type of computing device 14 the user is using, what rendering application 34 is calling the DRM system 32, the date, the time, etc. In addition, the rights description may limit the license 16 to a pre-determined number of plays, or pre-determined play time, for example. In such case, the DRM system 32 must refer to any state information with regard to the license 16, (i.e., how many times the digital content 12 has been rendered, the total amount of time the digital content 12 has been rendered, etc.), where such state information is stored in the state store 40 of the DRM system 32 on the user's computing device 14.

Accordingly, the license evaluator 36 of the DRM system 32 reviews the rights description of each valid license 16 to determine whether such valid license 16 confers the rights sought to the user. In doing so, the license evaluator 36 may have to refer to other data local to the user's computing device 14 to perform a determination of whether the user has the rights sought. As seen in Fig. 4, such data may include an identification 42 of the user's computing device (machine) 14 and particular aspects thereof, an identification 44 of the user and particular aspects thereof, an identification of the rendering application 34 and particular aspects thereof, a system clock 46, and the like. If no valid license 16 is found that provides the user with the right to render the digital

content 12 in the manner sought, the DRM system 32 may then perform the license acquisition function described below to obtain such a license 16, if in fact such a license 16 is obtainable.

Of course, in some instances the user cannot obtain the right to render the digital content 12 in the manner requested, because the content owner of such digital content 12 has in effect directed that such right not be granted. For example, the content owner of such digital content 12 may have directed that no license 16 be granted to allow a user to print a text document, or to copy a multimedia presentation into an un-encrypted form. In one embodiment of the present invention, the digital content 12 includes data on what rights are available upon purchase of a license 16, and types of licenses 16 available. However, it will be recognized that the content owner of a piece of digital content 12 may at any time change the rights currently available for such digital content 12 by changing the licenses 16 available for such digital content 12.

15 **DRM SYSTEM 32 - License Acquisition**

Referring now to Fig. 7, if in fact the license evaluator 36 does not find in the license store 38 any valid, enabling license 16 corresponding to the requested digital content 12, the DRM system 32 may then perform the function of license acquisition. As shown in Fig. 3, each piece of digital content 12 is packaged with information in an un-encrypted form regarding how to obtain a license 16 for rendering such digital content 12 (i.e., license acquisition information).

In one embodiment of the present invention, such license acquisition information may include (among other things) types of licenses 16 available, and one or more Internet web sites or other site information at which one or more appropriate license servers 24 may be accessed, where each such license server 24 is in fact capable of issuing a license 16 corresponding to the digital content 12. Of course, the license 16 may be obtained in other manners without departing from the spirit and scope of the present invention. For example, the license 16 may be obtained from a license server 24 at an electronic bulletin board, or even in person or via regular mail in the form of a file on a magnetic or optical disk or the like.

Assuming that the location for obtaining a license 16 is in fact a license server 24 on a network, the license evaluator 36 then establishes a network connection to such license server 24 based on the web site or other site information, and then sends a request for a license 16 from such connected license server 24 (steps 701, 703). In particular, once the DRM system 32 has contacted the license server 24, such DRM system 32 transmits appropriate license request information 36 to such license server 24. In one embodiment of the present invention, such license 16 request information 36 may include:

- the public key of the black box 30 of the DRM system 32 (PU-BB);
- the version number of the black box 30 of the DRM system 32;
- a certificate with a digital signature from a certifying authority certifying the black box 30 (where the certificate may in fact include the aforementioned public key and version number of the black box 30);
- the content ID (or package ID) that identifies the digital content 12 (or package 12p);
- the key ID that identifies the decryption key (KD) for decrypting the digital content 12;
- the type of license 16 requested (if in fact multiple types are available);
- the type of rendering application 34 that requested rendering of the digital content 12;

and/or the like, among other things. Of course, greater or lesser amounts of license 16 request information 36 may be transmitted to the license server 24 by the DRM system 32 without departing from the spirit and scope of the present invention. For example, information on the type of rendering application 34 may not be necessary, while additional information about the user and/or the user's computing device 14 may be necessary.

Once the license server 24 has received the license 16 request information 36 from the DRM system 32, the license server 24 may then perform several checks for trust / authentication and for other purposes. In one embodiment of the present invention, such license server 24 checks the certificate with the digital signature of the certifying authority to determine whether such has been adulterated or otherwise modified (steps 705, 707). If so, the license server 24 refuses to grant any license 16 based on the request

information 36. The license server 24 may also maintain a list of known 'bad' users and/or user's computing devices 14, and may refuse to grant any license 16 based on a request from any such bad user and/or bad user's computing device 14 on the list. Such 'bad' list may be compiled in any appropriate manner without departing from the spirit and scope of the present invention.

Based on the received request and the information associated therewith, and particularly based on the content ID (or package ID) in the license request information, the license server 24 can interrogate the content-key database 20 (Fig. 1) and locate a record corresponding to the digital content 12 (or package 12p) that is the basis of the request. As was discussed above, such record contains the decryption key (KD), key ID, and content ID for such digital content 12. In addition, such record may contain license data regarding the types of licenses 16 to be issued for the digital content 12 and the terms and conditions for each type of license 16. Alternatively, such record may include a pointer, link, or reference to a location having such additional information.

As mentioned above, multiple types of licenses 16 may be available. For example, for a relatively small license fee, a license 16 allowing a limited number of renderings may be available. For a relatively greater license fee, a license 16 allowing unlimited renderings until an expiration date may be available. For a still greater license fee, a license 16 allowing unlimited renderings without any expiration date may be available. Practically any type of license 16 having any kind of license terms may be devised and issued by the license server 24 without departing from the spirit and scope of the present invention.

In one embodiment of the present invention, the request for a license 16 is accomplished with the aid of a web page or the like as transmitted from the license server 24 to the user's computing device 14. Preferably, such web page includes information on all types of licenses 16 available from the license server 24 for the digital content 12 that is the basis of the license 16 request.

In one embodiment of the present invention, prior to issuing a license 16, the license server 24 checks the version number of the black box 30 to determine whether such black box 30 is relatively current (steps 709, 711). As should be understood, the

black box 30 is intended to be secure and protected from attacks from a user with nefarious purposes (i.e., to improperly render digital content 12 without a license 16, or outside the terms of a corresponding license 16). However, it is to be recognized that no system and no software device is in fact totally secure from such an attack.

5 As should also be understood, if the black box 30 is relatively current, i.e., has been obtained or updated relatively recently, it is less likely that such black box 30 has been successfully attacked by such a nefarious user. Preferably, and as a matter of trust, if the license server 24 receives a license request with request information 36 including a black box 30 version number that is not relatively current, such license server 24 refuses to
10 issue the requested license 16 until the corresponding black box 30 is upgraded to a current version, as will be described below. Put simply, the license server 24 will not trust such black box 30 unless such black box 30 is relatively current.

 In the context of the black box 30 of the present invention, the term
 ‘current’ or ‘relatively current’ may have any appropriate meaning without departing from
15 the spirit and scope of the present invention, consistent with the function of providing trust in the black box 30 based on the age or use thereof. For example, ‘current’ may be defined according to age (i.e., less than one month old). As an alternative example, ‘current’ may be defined based on a number of times that the black box 30 has decrypted digital content 12 (i.e., less than 200 instances of decryption). Moreover, ‘current’ may be based on
20 policy as set by each license server 24, where one license server 24 may define ‘current’ differently from another license server 24, and a license server 24 may further define ‘current’ differently depending on the digital content 12 for which a license 16 is requested, or depending on the type of license 16 requested, among other things.

 Assuming that the license server 24 is satisfied from the version number of
25 a black box 30 or other indicia thereof that such black box 30 is current, the license server 24 then proceeds to negotiate terms and conditions for the license 16 with the user (step 713). Alternatively, the license server 24 negotiates the license 16 with the user, then satisfies itself from the version number of the black box 30 that such black box 30 is current (i.e., performs step 713, then step 711). Of course, the amount of negotiation
30 varies depending on the type of license 16 to be issued, and other factors. For example, if

the license server 24 is merely issuing a paid-up unlimited use license 16, very little need be negotiated. On the other hand, if the license 16 is to be based on such items as varying values, sliding scales, break points, and other details, such items and details may need to be worked out between the license server 24 and the user before the license 16 can be
5 issued.

As should be understood, depending on the circumstances, the license negotiation may require that the user provide further information to the license server 24 (for example, information on the user, the user's computing device 14, etc.). Importantly, the license negotiation may also require that the user and the license server 24 determine a
10 mutually acceptable payment instrument (a credit account, a debit account, a mailed check, etc.) and/or payment method (paid-up immediately, spread over a period of time, etc.), among other things.

Once all the terms of the license 16 have been negotiated and agreed to by both the license server 24 and user (step 715), a digital license 16 is generated by the
15 license server 24 (step 719), where such generated license 16 is based at least in part on the license request, the black box 30 public key (PU-BB), and the decryption key (KD) for the digital content 12 that is the basis of the request as obtained from the content-key database 20. In one embodiment of the present invention, and as seen in Fig. 8, the generated license 16 includes:

- 20 - the content ID of the digital content 12 to which the license 16 applies;
- a Digital Rights License (DRL) 48 (i.e., the rights description or actual terms and conditions of the license 16 written in a predetermined form that the license evaluator 36 can interrogate), perhaps encrypted with the decryption key (KD) (i.e., KD (DRL));
- 25 - the decryption key (KD) for the digital content 12 encrypted with the black box 30 public key (PU-BB) as receive in the license request (i.e.,(PU-BB (KD)));
- a digital signature from the license server 24 (without any attached certificate) based on (KD (DRL)) and (PU-BB (KD)) and encrypted with
- 30 the license server 24 private key (i.e., (S (PR-LS))); and

- the certificate that the license server 24 obtained previously from the content server 22, such certificate indicating that the license server 24 has the authority from the content server 22 to issue the license 16 (i.e., (CERT (PU-LS) S (PR-CS))).

5 As should be understood, the aforementioned elements and perhaps others are packaged into a digital file or some other appropriate form. As should also be understood, if the DRL 48 or (PU-BB (KD)) in the license 16 should become adulterated or otherwise modified, the digital signature (S (PR-LS)) in the license 16 will not match and therefore will not validate such license 16. For this reason, the DRL 48 need not necessarily be in
10 an encrypted form (i.e., (KD(DRL)) as mentioned above), although such encrypted form may in some instances be desirable and therefore may be employed without departing from the spirit and scope of the present invention.

Once the digital license 16 has been prepared, such license 16 is then issued to the requestor (i.e., the DRM system 32 on the user's computing device 14) (step 719 of
15 Fig. 7). Preferably, the license 16 is transmitted over the same path through which the request therefor was made (i.e., the Internet or another network), although another path may be employed without departing from the spirit and scope of the present invention. Upon receipt, the requesting DRM system 32 preferably automatically places the received digital license 16 in the license store 38 (step 721).

20 It is to be understood that a user's computing device 14 may on occasion malfunction, and licenses 16 stored in the license store 38 of the DRM system 32 on such user's computing device 14 may become irretrievably lost. Accordingly, it is preferable that the license server 24 maintain a database 50 of issued licenses 16 (Fig. 1), and that such license server 24 provide a user with a copy or re-issue (hereinafter 're-issue') of an
25 issued license 16 if the user is in fact entitled to such re-issue. In the aforementioned case where licenses 16 are irretrievably lost, it is also likely the case that state information stored in the state store 40 and corresponding to such licenses 16 is also lost. Such lost state information should be taken into account when re-issuing a license 16. For example, a fixed number of renderings license 16 might legitimately be re-issued in a pro-rated form
30 after a relatively short period of time, and not re-issued at all after a relatively longer

period of time.

DRM SYSTEM 32 - Installation/Upgrade of Black Box 30

As was discussed above, as part of the function of acquiring a license 16, the license server 24 may deny a request for a license 16 from a user if the user's computing device 14 has a DRM system 32 with a black box 30 that is not relatively current, i.e., has a relatively old version number. In such case, it is preferable that the black box 30 of such DRM system 32 be upgraded so that the license acquisition function can then proceed. Of course, the black box 30 may be upgraded at other times without departing from the spirit and scope of the present invention.

Preferably, as part of the process of installing the DRM system 32 on a user's computing device 14, a non-unique 'lite' version of a black box 30 is provided. Such 'lite' black box 30 is then upgraded to a unique regular version prior to rendering a piece of digital content 12. As should be understood, if each black box 30 in each DRM system 32 is unique, a security breach into one black box 30 cannot easily be replicated with any other black box 30.

Referring now to Fig. 9, the DRM system 32 obtains the unique black box 30 by requesting same from a black box server 26 or the like (as was discussed above and as shown in Fig. 1) (step 901). Typically, such request is made by way of the Internet, although other means of access may be employed without departing from the spirit and scope of the present invention. For example, the connection to a black box server 26 may be a direct connection, either locally or remotely. An upgrade from one unique non-lite black box 30 to another unique non-lite black box 30 may also be requested by the DRM system 32 at any time, such as for example a time when a license server 24 deems the black box 30 not current, as was discussed above.

Thereafter, the black box server 26 generates a new unique black box 30 (step 903). As seen in Fig. 3, each new black box 30 is provided with a version number and a certificate with a digital signature from a certifying authority. As was discussed above in connection with the license acquisition function, the version number of the black box 30 indicates the relative age and/or use thereof. The certificate with the digital

signature from the certifying authority, also discussed above in connection with the license acquisition function, is a proffer or vouching mechanism from the certifying authority that a license server 24 should trust the black box 30. Of course, the license server 24 must trust the certifying authority to issue such a certificate for a black box 30 that is in fact trustworthy. It may be the case, in fact, that the license server 24 does not trust a particular certifying authority, and refuses to honor any certificate issued by such certifying authority. Trust may not occur, for example, if a particular certifying authority is found to be engaging in a pattern of improperly issuing certificates.

Preferably, and as was discussed above, the black box server 26 includes a new unique public / private key pair (PU-BB, PR-BB) with the newly generated unique black box 30 (step 903 of Fig. 9). Preferably, the private key for the black box 30 (PR-BB) is accessible only to such black box 30, and is hidden from and inaccessible by the remainder of the world, including the computing device 14 having the DRM system 32 with such black box 30, and the user thereof.

Most any hiding scheme may be employed without departing from the spirit and scope of the present invention, so long as such hiding scheme in fact performs the function of hiding the private key (PR-BB) from the world. As but one example, the private key (PR-BB) may be split into several sub-components, and each sub-component may be encrypted uniquely and stored in a different location. In such a situation, it is preferable that such sub-components are never assembled in full to produce the entire private key (PR-BB).

In one embodiment of the present invention, such private key (PR-BB) is encrypted according to code-based encryption techniques. In particular, in such embodiment, the actual software code of the black box 30 (or other software code) is employed as encrypting key(s). Accordingly, if the code of the black box 30 (or the other software code) becomes adulterated or otherwise modified, for example by a user with nefarious purposes, such private key (PR-BB) cannot be decrypted.

Although each new black box 30 is delivered with a new public / private key pair (PU-BB, PR-BB), such new black box 30 is also preferably given access to old public / private key pairs from old black boxes 30 previously delivered to the DRM system

32 on the user's computing device 14 (step 905). Accordingly, the upgraded black box 30 can still employ the old key pairs to access older digital content 12 and older corresponding licenses 16 that were generated according to such old key pairs, as will be discussed in more detail below.

5 Preferably, the upgraded black box 30 delivered by the black box server 26 is tightly tied to or associated with the user's computing device 14. Accordingly, the upgraded black box 30 cannot be operably transferred among multiple computing devices 14 for nefarious purposes or otherwise. In one embodiment of the present invention, as part of the request for the black box 30 (step 901) the DRM system 32 provides hardware
10 information unique to such DRM system 32 and/or unique to the user's computing device 14 to the black box server 26, and the black box server 26 generates a black box 30 for the DRM system 32 based in part on such provided hardware information. Such generated upgraded black box 30 is then delivered to and installed in the DRM system 32 on the user's computing device 14 (steps 907, 909). If the upgraded black box 30 is then
15 somehow transferred to another computing device 14, the transferred black box 30 recognizes that it is not intended for such other computing device 14, and does not allow any requested rendering to proceed on such other computing device 14.

Once the new black box 30 is installed in the DRM system 32, such DRM system 32 can proceed with a license acquisition function or with any other function.

20

DRM SYSTEM 32 - Content Rendering, Part 3

Referring now to Fig. 5B, and assuming, now, that the license evaluator 36 has found at least one valid license 16 and that at least one of such valid licenses 16 provides the user with the rights necessary to render the corresponding digital content 12
25 in the manner sought (i.e., is enabling), the license evaluator 36 then selects one of such licenses 16 for further use (step 519). Specifically, to render the requested digital content 12, the license evaluator 36 and the black box 30 in combination obtain the decryption key (KD) from such license 16, and the black box 30 employs such decryption key (KD) to decrypt the digital content 12. In one embodiment of the present invention, and as was
30 discussed above, the decryption key (KD) as obtained from the license 16 is encrypted

with the black box 30 public key (PU-BB(KD)), and the black box 30 decrypts such encrypted decryption key with its private key (PR-BB) to produce the decryption key (KD) (steps 521, 523). However, other methods of obtaining the decryption key (KD) for the digital content 12 may be employed without departing from the spirit and scope of the present invention.

Once the black box 30 has the decryption key (KD) for the digital content 12 and permission from the license evaluator 36 to render the digital content 12, control may be returned to the rendering application 34 (steps 525, 527). In one embodiment of the present invention, the rendering application 34 then calls the DRM system 32 / black box 30 and directs at least a portion of the encrypted digital content 12 to the black box 30 for decryption according to the decryption key (KD) (step 529). The black box 30 decrypts the digital content 12 based upon the decryption key (KD) for the digital content 12, and then the black box 30 returns the decrypted digital content 12 to the rendering application 34 for actual rendering (steps 533, 535). The rendering application 34 may either send a portion of the encrypted digital content 12 or the entire digital content 12 to the black box 30 for decryption based on the decryption key (KD) for such digital content 12 without departing from the spirit and scope of the present invention.

Preferably, when the rendering application 34 sends digital content 12 to the black box 30 for decryption, the black box 30 and/or the DRM system 32 authenticates such rendering application 34 to ensure that it is in fact the same rendering application 34 that initially requested the DRM system 32 to run (step 531). Otherwise, the potential exists that rendering approval may be obtained improperly by basing the rendering request on one type of rendering application 34 and in fact rendering with another type of rendering application 34. Assuming the authentication is successful and the digital content 12 is decrypted by the black box 30, the rendering application 34 may then render the decrypted digital content 12 (steps 533, 535).

Sequence of Key Transactions

Referring now to Fig. 10, in one embodiment of the present invention, a sequence of key transactions is performed to obtain the decryption key (KD) and evaluate

a license 16 for a requested piece of digital content 12 (i.e., to perform steps 515-523 of Figs. 5A and 5B). Mainly, in such sequence, the DRM system 32 obtains the decryption key (KD) from the license 16, uses information obtained from the license 16 and the digital content 12 to authenticate or ensure the validity of both, and then determines
5 whether the license 16 in fact provides the right to render the digital content 12 in the manner sought. If so, the digital content 12 may be rendered.

Bearing in mind that each license 16 for the digital content 12, as seen in Fig. 8, includes:

- the content ID of the digital content 12 to which the license 16 applies;
- 10 - the Digital Rights License (DRL) 48, perhaps encrypted with the decryption key (KD) (i.e., KD (DRL));
- the decryption key (KD) for the digital content 12 encrypted with the black box 30 public key (PU-BB) (i.e., (PU-BB (KD)));
- the digital signature from the license server 24 based on (KD (DRL)) and
15 (PU-BB (KD)) and encrypted with the license server 24 private key (i.e., (S (PR-LS))); and
- the certificate that the license server 24 obtained previously from the content server 22 (i.e., (CERT (PU-LS) S (PR-CS))),

and also bearing in mind that the package 12p having the digital content 12, as seen in Fig.
20 3, includes:

- the content ID of such digital content 12;
- the digital content 12 encrypted by KD (i.e., (KD(CONTENT)));
- a license acquisition script that is not encrypted; and
- the key KD encrypting the content server 22 public key (PU-CS), signed
25 by the content server 22 private key (PR-CS) (i.e., (KD (PU-CS) S (PR-CS))),

in one embodiment of the present invention, the specific sequence of key transactions that are performed with regard to a specific one of the licenses 16 for the digital content 12 is as follows:

- 30 1. Based on (PU-BB (KD)) from the license 16, the black box 30 of

the DRM system 32 on the user's computing device 14 applies its private key (PR-BB) to obtain (KD) (step 1001). $(PR-BB (PU-BB (KD))) = (KD)$. Note, importantly, that the black box 30 could then proceed to employ KD to decrypt the digital content 12 without any further ado. However, and also importantly, the license server 24 trusts the black box 30 not to do so. Such trust was established at the time such license server 24 issued the license 16 based on the certificate from the certifying authority vouching for the trustworthiness of such black box 30. Accordingly, despite the black box 30 obtaining the decryption key (KD) as an initial step rather than a final step, the DRM system 32 continues to perform all license 16 validation and evaluation functions, as described below.

2. Based on $(KD (PU-CS) S (PR-CS))$ from the digital content 12, the black box 30 applies the newly obtained decryption key (KD) to obtain (PU-CS) (step 1003). $(KD (KD (PU-CS))) = (PU-CS)$. Additionally, the black box 30 can apply (PU-CS) as against the signature $(S (PR-CS))$ to satisfy itself that such signature and such digital content 12 / package 12p is valid (step 1005). If not valid, the process is halted and access to the digital content 12 is denied.

3. Based on $(CERT (PU-LS) S (PR-CS))$ from the license 16, the black box 30 applies the newly obtained content server 22 public key (PU-CS) to satisfy itself that the certificate is valid (step 1007), signifying that the license server 24 that issued the license 16 had the authority from the content server 22 to do so, and then examines the certificate contents to obtain (PU-LS) (step 1009). If not valid, the process is halted and access to the digital content 12 based on the license 16 is denied.

4. Based on $(S (PR-LS))$ from the license 16, the black box 30 applies the newly obtained license server 24 public key (PU-LS) to satisfy itself that the license 16 is valid (step 1011). If not valid, the process is halted and access to the digital content 12 based on the license 16 is denied.

5. Assuming all validation steps are successful, and that the DRL 48 in the license 16 is in fact encrypted with the decryption key (KD), the license evaluator 36 then applies the already-obtained decryption key (KD) to $(KD(DRL))$ as obtained from the license 16 to obtain the license terms from the license 16 (i.e., the DRL 48) (step 1013).

Of course, if the DRL 48 in the license 16 is not in fact encrypted with the decryption key (KD), step 1013 may be omitted. The license evaluator 36 then evaluates / interrogates the DRL 48 and determines whether the user's computing device 14 has the right based on the DRL 48 in the license 16 to render the corresponding digital content 12 in the manner
5 sought (i.e., whether the DRL 48 is enabling) (step 1015). If the license evaluator 36 determines that such right does not exist, the process is halted and access to the digital content 12 based on the license 16 is denied.

6. Finally, assuming evaluation of the license 16 results in a positive determination that the user's computing device 14 has the right based on the DRL 48 terms
10 to render the corresponding digital content 12 in the manner sought, the license evaluator 36 informs the black box 30 that such black box 30 can render the corresponding digital content 12 according to the decryption key (KD). The black box 30 thereafter applies the decryption key (KD) to decrypt the digital content 12 from the package 12p (i.e.,
(KD(KD(CONTENT))) = (CONTENT)) (step 1017).

15 It is important to note that the above-specified series of steps represents an alternating or 'ping-ponging' between the license 16 and the digital content 12. Such ping-ponging ensures that the digital content 12 is tightly bound to the license 16, in that the validation and evaluation process can only occur if both the digital content 12 and license 16 are present in a properly issued and valid form. In addition, since the same
20 decryption key (KD) is needed to get the content server 22 public key (PU-CS) from the license 16 and the digital content 12 from the package 12p in a decrypted form (and perhaps the license terms (DRL 48) from the license 16 in a decrypted form), such items are also tightly bound. Signature validation also ensures that the digital content 12 and the license 16 are in the same form as issued from the content server 22 and the license server
25 24, respectively. Accordingly, it is difficult if not impossible to decrypt the digital content 12 by bypassing the license server 24, and also difficult if not impossible to alter and then decrypt the digital content 12 or the license 16.

In one embodiment of the present invention, signature verification, and especially signature verification of the license 16, is alternately performed as follows.
30 Rather than having a signature encrypted by the private key of the license server 16 (PR-

LS), as is seen in Fig. 8, each license 16 has a signature encrypted by a private root key (PR-R) (not shown), where the black box 30 of each DRM system 32 includes a public root key (PU-R) (also not shown) corresponding to the private root key (PR-R). The private root key (PR-R) is known only to a root entity, and a license server 24 can only
5 issue licenses 16 if such license server 24 has arranged with the root entity to issue licenses 16.

In particular, in such embodiment:

1. the license server 24 provides its public key (PU-LS) to the root entity;
2. the root entity returns the license server public key (PU-LS) to such
10 license server 24 encrypted with the private root key (PR-R) (i.e., (CERT (PU-LS) S (PR-R))); and
3. the license server 24 then issues a license 16 with a signature encrypted with the license server private key (S (PR-LS)), and also attaches to the license the certificate from the root entity (CERT (PU-LS) S (PR-R)).

15 For a DRM system 18 to validate such issued license 16, then, the DRM system 18:

1. applies the public root key (PU-R) to the attached certificate (CERT (PU-LS) S (PR-R)) to obtain the license server public key (PU-LS); and
2. applies the obtained license server public key (PU-LS) to the signature
20 of the license 16 (S (PR-LS)).

Importantly, it should be recognized that just as the root entity gave the license server 24 permission to issue licenses 16 by providing the certificate (CERT (PU-LS) S (PR-R)) to such license server 24, such license server 24 can provide a similar certificate to a second license server 24 (i.e., (CERT (PU-LS2) S (PR-LS1))), thereby
25 allowing the second license server to also issue licenses 16. As should now be evident, a license 16 issued by the second license server would include a first certificate (CERT (PU-LS1) S (PR-R)) and a second certificate (CERT (PU-LS2) S (PR-LS1)). Likewise, such license 16 is validated by following the chain through the first and second certificates. Of course, additional links in the chain may be added and traversed.

30 One advantage of the aforementioned signature verification process is that

the root entity may periodically change the private root key (PR-R), thereby likewise periodically requiring each license server 24 to obtain a new certificate (CERT (PU-LS) S (PR-R)). Importantly, as a requirement for obtaining such new certificate, each license server may be required to upgrade itself. As with the black box 30, if a license server 24 is relatively current, i.e., has been upgraded relatively recently, it is less likely that license server 24 has been successfully attacked. Accordingly, as a matter of trust, each license server 24 is preferably required to be upgraded periodically via an appropriate upgrade trigger mechanism such as the signature verification process. Of course, other upgrade mechanisms may be employed without departing from the spirit and scope of the present invention.

Of course, if the private root key (PR-R) is changed, then the public root key (PU-R) in each DRM system 18 must also be changed. Such change may for example take place during a normal black box 30 upgrade, or in fact may require that a black box 30 upgrade take place. Although a changed public root key (PU-R) may potentially interfere with signature validation for an older license 16 issued based on an older private root key (PR-R), such interference may be minimized by requiring that an upgraded black box 30 remember all old public root keys (PU-R). Alternatively, such interference may be minimized by requiring signature verification for a license 16 only once, for example the first time such license 16 is evaluated by the license evaluator 36 of a DRM system 18. In such case, state information on whether signature verification has taken place should be compiled, and such state information should be stored in the state store 40 of the DRM system 18.

Digital Rights License 48

In the present invention, the license evaluator 36 evaluates a Digital Rights License (DRL) 48 as the rights description or terms of a license 16 to determine if such DRL 48 allows rendering of a corresponding piece of digital content 12 in the manner sought. In one embodiment of the present invention, the DRL 48 may be written by a licensor (i.e., the content owner) in any DRL language.

As should be understood, there are a multitude of ways to specify a DRL

48. Accordingly, a high degree of flexibility must be allowed for in any DRL language. However, it is impractical to specify all aspects of a DRL 48 in a particular license language, and it is highly unlikely that the author of such a language can appreciate all possible licensing aspects that a particular digital licensor may desire. Moreover, a highly sophisticated license language may be unnecessary and even a hindrance for a licensor providing a relatively simple DRL 48. Nevertheless, a licensor should not be unnecessarily restricted in how to specify a DRL 48. At the same time, the license evaluator 36 should always be able to get answers from a DRL 48 regarding a number of specific license questions.

10 In the present invention, and referring now to Fig. 11, a DRL 48 can be specified in any license language, but includes a language identifier or tag 54. The license evaluator 36 evaluating the license 16, then, performs the preliminary step of reviewing the language tag 54 to identify such language, and then selects an appropriate license language engine 52 for accessing the license 16 in such identified language. As should be
15 understood, such license language engine 52 must be present and accessible to the license evaluator 36. If not present, the language tag 54 and/or the DRL 48 preferably includes a location 56 (typically a web site) for obtaining such language engine 52.

Typically, the language engine 52 is in the form of an executable file or set of files that reside in a memory of the user's computing device 14, such as a hard drive.
20 The language engine 52 assists the license evaluator 36 to directly interrogate the DRL 48, the license evaluator 36 interrogates the DRL 48 indirectly via the language engine 48 acting as an intermediary, or the like. When executed, the language engine 52 runs in a work space in a memory of the user's computing device 14, such as RAM. However, any other form of language engine 52 may be employed without departing from the spirit and
25 scope of the present invention.

Preferably, any language engine 52 and any DRL language supports at least a number of specific license questions that the license evaluator 36 expects to be answered by any DRL 48, as will be discussed below. Accordingly, the license evaluator 36 is not tied to any particular DRL language; a DRL 48 may be written in any appropriate DRL
30 language; and a DRL 48 specified in a new license language can be employed by an

existing license evaluator 36 by having such license evaluator 36 obtain a corresponding new language engine 52.

DRL Languages

5 Two examples of DRL languages, as embodied in respective DRLs 48, are provided below. The first, 'simple' DRL 48 is written in a DRL language that specifies license attributes, while the second 'script' DRL 48 is written in a DRL language that can perform functions according to the script specified in the DRL 48. While written in a DRL language, the meaning of each line of code should be apparent based on the linguistics
10 thereof and/or on the attribute description chart that follows:

Simple DRL 48:

<LICENSE>
 <DATA>
15 <NAME>Beastie Boy's Play</NAME>
 <ID>39384</ID>
 <DESCRIPTION>Play the song 3 times</DESCRIPTION>
 <TERMS></TERMS>
 <VALIDITY>
20 <NOTBEFORE>19980102 23:20:14Z</NOTBEFORE>
 <NOTAFTER>19980102 23:20:14Z</NOTAFTER>
 </VALIDITY>
 <ISSUEDDATE>19980102 23:20:14Z</ISSUEDDATE>
 <LICENSORSITE>http://www.foo.com</LICENSORSITE>
25 <CONTENT>
 <NAME>Beastie Boy's</NAME>
 <ID>392</ID>
 <KEYID>39292</KEYID>
 <TYPE>MS Encrypted ASF 2.0</TTYPER>
30 </CONTENT>
 <OWNER>
 <ID>939KDKD393KD</ID>
 <NAME>Universal</NAME>
 <PUBLICKEY></PUBLICKEY>
35 </OWNER>
 <LICENSEE>
 <NAME>Arnold</NAME>
 <ID>939KDKD393KD</ID>
 <PUBLICKEY></PUBLICKEY>

[illegible][illegible][illegible]

```

5      </DATA>
      <SIGNATURE>
        <SIGNERNAME>Universal</SIGNERNAME>
        <SIGNERID>9382</SIGNERID>
        <SIGNERPUBKEY></SIGNERPUBKEY>
        <HASHID>MD5</HASHID>
        <SIGNID>RSA 128</SIGNID>
        <SIGNATURE>xxxxxxxxyyyxxxxyyy</SIGNATURE>
        <CONTENTSIGNEDSIGNERPUBKEY></CONTENTSIGNEDSIGN
10      ERPUBKEY>
      </SIGNATURE>
</LICENSE>

```

15 In the two DRLs 48 specified above, the attributes listed have the following descriptions and data types:

Attribute	Description	Data Type
Id	ID of the license	GUID
Name	Name of the license	String
Content Id	ID of the content	GUID
Content Key Id	ID for the encryption key of the content	GUID
Content Name	Name of the content	String
Content Type	Type of the content	String
Owner Id	ID of the owner of the content	GUID
Owner Name	Name of the owner of the content	String
Owner Public Key	Public key for owner of content. This is a base-64 encoded public key for the owner of the content.	String
Licensee Id	Id of the person getting license. It may be null.	GUID
Licensee Name	Name of the person getting license. It may be null.	String
Licensee Public Key	Public key of the licensee. This is the base-64 encoded public key of the licensee. It may be null.	String
Description	Simple human readable description of the license	String
Terms	Legal terms of the license. This may be a pointer to a web page containing legal prose.	String
Validity Not After	Validity period of license expiration	Date
Validity Not Before	Validity period of license start	Date

Issued Date	Date the license was issued	Date
DRL Type	Type of the DRL. Example include "SIMPLE" or "SCRIPT"	String
DRL Data	Data specific to the DRL	String
Enabling Bits	These are the bits that enable access to the actual content. The interpretation of these bits is up to the application, but typically this will be the private key for decryption of the content. This data will be base-64 encoded. Note that these bits are encrypted using the public key of the individual machine.	String
Signer Id	ID of person signing license	GUID
Signer Name	Name of person signing license	String
Signer Public Key	Public key for person signing license. This is the base-64 encode public key for the signer.	String
Content Signed Signer Public Key	Public key for person signing the license that has been signed by the content server private key. The public key to verify this signature will be encrypted in the content. This is base-64 encoded.	String
Hash Alg Id	Algorithm used to generate hash. This is a string, such as "MD5".	String
Signature Alg Id	Algorithm used to generate signature. This is a string, such as "RSA 128".	String
Signature	Signature of the data. This is base-64 encoded data.	String

Methods

As was discussed above, it is preferable that any language engine 52 and any DRL language support at least a number of specific license questions that the digital license evaluator 36 expects to be answered by any DRL 48. Recognizing such supported questions may include any questions without departing from the spirit and scope of the present invention, and consistent with the terminology employed in the two DRL 48 examples above, in one embodiment of the present invention, such supported questions or 'methods' include 'access methods', 'DRL methods', and 'enabling use methods', as follows:

This method is used to communicate with a more advanced DRL 48. It is largely about future expandability of the DRL 48 feature set.

Variant GetExpires(BSTR action, Variant data)

5

This method returns the expiration date of a license 16 with regard to the passed-in action. If the return value is NULL, the license 16 is assumed to never expire or does not yet have an expiration date because it hasn't been activated, or the like.

10 Variant GetCount(BSTR action, Variant data)

This method returns the number of operations of the passed-in action that are left. If NULL is returned, the operation can be performed an unlimited number of times.

15 Boolean IsEnabled(BSTR action, Variant data)

This method indicates whether the license 16 supports the requested action at the present time.

Boolean IsSunk(BSTR action, Variant data)

20

This method indicates whether the license 16 has been paid for. A license 16 that is paid for up front would return TRUE, while a license 16 that is not paid for up front, such as a license 16 that collects payments as it is used, would return FALSE.

25 Enabling Use Methods.

These methods are employed to enable a license 16 for use in decrypting content.

Boolean Validate (BSTR key)

30

0948293-01300
00270-26626160

Access Methods

Access methods are used to query a DRL 48 for top-level attributes.

5 VARIANT QueryAttribute (BSTR key)

Valid keys include License.Name, License.Id, Content.Name, Content.Id, Content.Type, Owner.Name, Owner.Id, Owner.PublicKey, Licensee.Name, Licensee.Id, Licensee.PublicKey, Description, and Terms, each returning a BSTR variant; and Issued, Validity.Start and Validity.End, each returning a Date Variant.

DRL Methods

The implementation of the following DRL methods varies from DRL 48 to DRL 48. Many of the DRL methods contain a variant parameter labeled ‘data’ which is intended for communicating more advanced information with a DRL 48. It is present largely for future expandability.

Boolean IsActivated(Variant data)

20 This method returns a Boolean indicating whether the DRL 48 / license 16 is activated.
An example of an activated license 16 is a limited operation license 16 that upon first play
is active for only 48 hours.

Activate(Variant data)

25 This method is used to activate a license 16. Once a license 16 is activated, it cannot be deactivated.

Variant QueryDRL(Variant data)

30

This method is used to validate a license 16. The passed-in key is the black box 30 public key (PU-BB) encrypted by the decryption key (KD) for the corresponding digital content 12 (i.e., (KD(PU-BB))) for use in validation of the signature of the license 16. A return value of TRUE indicates that the license 16 is valid. A return value of FALSE indicates
5 invalid.

```
int OpenLicense 16(BSTR action, BSTR key, Variant data)
```

This method is used to get ready to access the decrypted enabling bits. The passed-in key is (KD(PU-BB)) as described above. A return value of 0 indicates success. Other return values can be defined.

BSTR GetDecryptedEnablingBits (BSTR action, Variant data)

Variant GetDecryptedEnablingBitsAsBinary (BSTR action, Variant Data)

15

These methods are used to access the enabling bits in decrypted form. If this is not successful for any of a number of reasons, a null string or null variant is returned.

void CloseLicense 16 (BSTR action, Variant data)

20 This method is used to unlock access to the enabling bits for performing the passed-in action. If this is not successful for any of a number of reasons, a null string is returned.

Heuristics

As was discussed above, if multiple licenses 16 are present for the same piece of digital content 12, one of the licenses 16 must be chosen for further use. Using the above methods, the following heuristics could be implemented to make such choice. In particular, to perform an action (say "PLAY") on a piece of digital content 12, the following steps could be performed:

30 1. Get all licenses 16 that apply to the particular piece of digital

content 12.

2. Eliminate each license 16 that does not enable the action by calling the IsEnabled function on such license 16.

3. Eliminate each license 16 that is not active by calling IsActivated on such license 16.

4. Eliminate each license 16 that is not paid for up front by calling IsSunk on such license 16.

5. If any license 16 is left, use it. Use an unlimited-number-of-plays license 16 before using a limited-number-of-plays license 16, especially if the unlimited-number-of-plays license 16 has an expiration date. At any time, the user should be allowed to select a specific license 16 that has already been acquired, even if the choice is not cost-effective. Accordingly, the user can select a license 16 based on criteria that are perhaps not apparent to the DRM system 32.

6. If there are no licenses 16 left, return status so indicating. The user would then be given the option of:

using a license 16 that is not paid for up front, if available;

activating a license 16, if available; and/or

performing license acquisition from a license server 24.

CONCLUSION

The programming necessary to effectuate the processes performed in connection with the present invention is relatively straight-forward and should be apparent to the relevant programming public. Accordingly, such programming is not attached hereto. Any particular programming, then, may be employed to effectuate the present invention without departing from the spirit and scope thereof.

In the foregoing description, it can be seen that the present invention comprises a new and useful enforcement architecture 10 that allows the controlled rendering or playing of arbitrary forms of digital content 12, where such control is flexible and definable by the content owner of such digital content 12. Also, the present invention

comprises a new useful controlled rendering environment that renders digital content 12 only as specified by the content owner, even though the digital content 12 is to be rendered on a computing device 14 which is not under the control of the content owner. Further, the present invention comprises a trusted component that enforces the rights of the content owner on such computing device 14 in connection with a piece of digital content 12, even against attempts by the user of such computing device 14 to access such digital content 12 in ways not permitted by the content owner.

It should be appreciated that changes could be made to the embodiments described above without departing from the inventive concepts thereof. It should be understood, therefore, that this invention is not limited to the particular embodiments disclosed, but it is intended to cover modifications within the spirit and scope of the present invention as defined by the appended claims.

CLAIMS

5

1. An enforcement architecture for digital rights management, wherein the architecture enforces rights in protected digital content, the architecture comprising:
 - a content server for distributing the digital content;
 - a license server for issuing at least one digital license corresponding
 - 10 to and separate from the digital content; and
 - a computing device for receiving the distributed digital content and for receiving and storing any digital license corresponding to the digital content, the computing device having:
 - a rendering application for rendering the digital content; and
 - 15 a Digital Rights Management (DRM) system for being invoked by the rendering application upon such rendering application attempting to render the digital content, the DRM system for determining whether a right to render the digital content in the manner sought exists based on any digital license stored in the computing device and corresponding to the digital content.
- 20 2. The architecture of claim 1, wherein the content server is communicatively coupled to a network and distributes the digital content over the network.
3. The architecture of claim 2, wherein the content server is
- 25 communicatively coupled to the Internet and distributes the digital content over the Internet.
4. The architecture of claim 1, wherein the license server is
- communicatively coupled to a network and issues the at least one digital license over the
- 30 network.

5. The architecture of claim 4, wherein the license server is communicatively coupled to the Internet and issues the at least one digital license over the Internet.

5

6. The architecture of claim 1, wherein the content server is communicatively coupled to a portable medium writer and distributes the digital content on a portable medium written by the portable medium writer, the portable medium selected from the group consisting of an optical storage medium and a magnetic storage medium.

10

7. The architecture of claim 1, wherein the content server distributes the digital content in an encrypted form.

8. The architecture of claim 7, wherein each digital license
15 corresponding to the digital content includes:

a decryption key that decrypts the encrypted digital content; and

a description of the rights conferred by the license, wherein the encrypted digital content cannot be decrypted and rendered without obtaining such license from the license server.

20

9. The architecture of claim 8, wherein each digital license corresponding to the digital content further includes a digital signature that binds the license to the encrypted digital content.

25 10. The architecture of claim 1, wherein if the DRM system determines that the right to render the digital content in the manner sought does not exist based on any digital license stored in the computing device and corresponding to the digital content, such DRM system directs a computing device user to the license server to obtain a digital license to render such digital content in the manner sought.

30

11. The architecture of claim 1, wherein if the DRM system determines that the right to render the digital content in the manner sought does not exist based on any digital license stored in the computing device and corresponding to the digital content, such DRM system transparently obtains a digital license from the license server without
5 any action necessary on the part of a computing device user.

12. The architecture of claim 1, wherein the DRM system includes a license store for storing digital licenses.

10 13. The architecture of claim 1, wherein each digital license
corresponding to the digital content is bound to such digital content.

14. The architecture of claim 13, wherein each digital license
corresponding to the digital content is bound to such digital content by way of a public /
15 private key technique.

15. The architecture of claim 1, wherein the license server issues a digital license to a DRM system only if the license server trusts such DRM system to abide by the license.

16. The architecture of claim 15, wherein the content server distributes the digital content in an encrypted form, and wherein the DRM system includes a trusted black box for performing decryption and encryption functions for such DRM system.

25 17. The architecture of claim 16, wherein the black box includes a
unique public / private key pair for performing the decryption and encryption functions.

18. The architecture of claim 17, wherein the license server issues each digital license in response to a license request from the DRM system, the license request including the black box public key, the license server encrypting at least a portion of the

digital license according to the black box public key prior to issuance of such license, thereby binding such license to such black box.

19. The architecture of claim 18, wherein the content server distributes
5 the digital content in an encrypted form, wherein each digital license corresponding to the
digital content includes a decryption key that decrypts the encrypted digital content, and
wherein the license server encrypts the decryption key in the license according to the black
box public key.

10 20. The architecture of claim 19, wherein each digital license
corresponding to the digital content further includes a description of the rights conferred
by the license, wherein the encrypted digital content cannot be decrypted and rendered
without obtaining such license from the license server, and wherein the license server
encrypts the rights description in the license according to the decryption key.

15

21. The architecture of claim 16, wherein the black box includes a version number.

22. The architecture of claim 21 wherein the license server issues each
20 digital license in response to a license request from the DRM system, the license request
including the version number of the black box, the license server determining prior to
issuance of the license whether the version number of the black box is acceptable, the
license server upon determining that the version number of the black box is not acceptable
refusing to issue the license until the black box is updated, the architecture further
25 comprising a black box server for providing an updated black box to the DRM system.

23. The architecture of claim 16, wherein the black box includes a certifying authority signature as provided by an approved certifying authority.

30 24. The architecture of claim 23 wherein the license server issues each

digital license in response to a license request from the DRM system, the license request including the certifying authority signature, the license server determining prior to issuance of the license whether the certifying authority signature is valid.

5 25. The architecture of claim 15, wherein each digital license
corresponding to the digital content includes a description of the rights conferred by the
license, and wherein the DRM system includes a trusted license evaluator for evaluating
the rights description and allowing rendering of the digital content by the rendering
application only if such rendering is in accordance with the rights description of the
10 license.

26. The architecture of claim 1 further comprising an issued license database for maintaining information on digital licenses issued by the license server, wherein if the computing device loses a received license, a re-issue thereof may be provided based on the information in the issued license database.

27. The architecture of claim 1 further comprising an authoring tool for authoring the digital content distributed by the content server in a form amenable to the architecture.

28. The architecture of claim 27 wherein the authoring tool encrypts the digital content according to a decryption key and stores information on the digital content and the encryption key in a content-key database.

25 29. The architecture of claim 28 wherein the license server accesses the information on the digital content and the encryption key in the content-key database prior to issuance of a license corresponding to the digital content, and includes the decryption key with such license as issued.

30 30. A method for implementing digital rights management, wherein the

method enforces rights in protected digital content, the method comprising:

distributing the digital content from a content server to a computing device of a user;

receiving the distributed digital content at the computing device;

5 attempting to render the digital content by way of a rendering
application;

invoking, by the rendering application, a Digital Rights

Management (DRM) system upon such rendering application attempting to render the digital content;

10 determining, by the DRM system, whether a right to render the digital content in the manner sought exists based on any digital license stored in the computing device and corresponding to the digital content; and

if the right does not exist:

requesting from a license server a digital license that
15 provides such right and that corresponds to and is separate from the digital content;

issuing, by the license server, the digital license to the DRM

receiving, by the computing device, the issued digital license corresponding to the digital content from the license server; and

20 storing the received digital license on the computing device.

31. The method of claim 30, wherein the distributing step comprises distributing the digital content over a network.

25 32. The method of claim 31, wherein the distributing step comprises
distributing the digital content over the Internet.

33. The method of claim 30, wherein the issuing step comprises issuing the digital license over a network.

30

[illegible]

34. The method of claim 33, wherein the issuing step comprises issuing the digital license over the Internet.

35. The method of claim 30, wherein the distributing step comprises
5 distributing the digital content on a portable medium selected from the group consisting of an optical storage medium and a magnetic storage medium.

36. The method of claim 30, wherein the distributing step comprises distributing the digital content in an encrypted form.

10

37. The method of claim 36, further comprising including with each digital license corresponding to the digital content:

a decryption key that decrypts the encrypted digital content; and
a description of the rights conferred by the license, wherein the
15 encrypted digital content cannot be decrypted and rendered without obtaining such license from the license server.

38. The method of claim 37, wherein the including step further comprises including with each digital license corresponding to the digital content a digital
20 signature that binds the license to the encrypted digital content.

39. The method of claim 30, wherein the requesting a digital license step comprises directing, by the DRM system, a computing device user to the license server to obtain a digital license to render such digital content in the manner sought.

25

40. The method of claim 30, wherein the requesting a digital license step comprises transparently obtaining, by the DRM system, a digital license from the license server without any action necessary on the part of a computing device user.

30

41. The method of claim 30, wherein the storing step comprises storing,

by the DRM system, the received digital license in a license store of the DRM system.

42. The method of claim 30, further comprising binding, by the license server, the digital license to the corresponding digital content.

5

43. The method of claim 42, comprising binding, by the license server, the digital license to the corresponding digital content by way of a public / private key technique.

10

44. The method of claim 30, wherein the issuing step comprises issuing, by the license server, the digital license to the DRM system only if the license server trusts such DRM system to abide by the license.

15

45. The method of claim 44, wherein the distributing step comprises distributing, by the content server, the digital content in an encrypted form, and further comprising employing a trusted black box in the DRM system to perform decryption and encryption functions for such DRM system.

20

46. The method of claim 45, wherein the black box includes a public / private key pair, and wherein the requesting a digital license step comprises including in the request the black box public key, and further comprising encrypting, by the license server, at least a portion of the digital license according to the black box public key prior to issuance of such license, thereby binding such license to such black box.

47. The method of claim 46, wherein the distributing step comprises distributing the digital content in an encrypted form, and further comprising:

including with each digital license corresponding to the digital content a decryption key that decrypts the encrypted digital content; and

5 encrypting, by the license server, the decryption key in the license
according to the black box public key.

48. The method of claim 47, further comprising:

including with each digital license corresponding to the digital

10 content a description of the rights conferred by the license, wherein the encrypted digital
content cannot be decrypted and rendered without obtaining such license from the license
server; and

encrypting, by the license server, the rights description in the license according to the decryption key.

15

49. The method of claim 45, wherein the black box includes a version wherein the requesting a digital license step comprises including in the version number of the black box, and further comprising:

determining, by the license server, prior to issuance of the license

20 whether the version number of the black box is acceptable; and

upon determining that the version number of the black box is not acceptable, the license server refusing to issue the license until the black box is updated, the architecture further comprising a black box server for providing an updated black box to the DRM system.

25

50. The method of claim 45, wherein the black box includes a certifying authority signature as provided by an approved certifying authority, and wherein the requesting a digital license step comprises including the certifying authority signature, the license server determining prior to issuance of the license whether the certifying authority signature is valid.

51. The method of claim 44, wherein the issuing the digital license step comprises including with the digital license a description of the rights conferred by the
5 license, and further comprising:

evaluating, by a trusted license evaluator of the DRM system, the rights description; and

allowing rendering of the digital content by the rendering application only if such rendering is in accordance with the rights description of the
10 license.

52. The method of claim 30 further comprising maintaining information on digital licenses issued by the license server in an issued license database, wherein if the computing device loses a received license, a re-issue thereof may be provided based on the
15 information in the issued license database.

53. The method of claim 30 further comprising authoring, by an authoring tool, the digital content distributed by the content server in a form amenable to the architecture.
20

54. The method of claim 53 wherein the authoring step comprises:
encrypting the digital content according to a decryption key; and
storing information on the digital content and the encryption key in a content-key database.
25

55. The method of claim 54 wherein the issuing the digital license step comprises:
accessing, by the license server, the information on the digital content and the encryption key in the content-key database prior to issuance of a license
30 corresponding to the digital content; and

0948993-04300
00270-2668460

including the decryption key with such license as issued.

56. An enforcement architecture for digital rights management, wherein the architecture enforces rights in protected digital content, the architecture comprising:

5 a content server communicatively coupled to a network for distributing the digital content over the network;

a license server for issuing at least one digital license corresponding to and separate from the digital content, the license server being communicatively coupled to the network for issuing the at least one digital license over the network; and

10 a computing device communicatively coupled to the network for receiving the distributed digital content and for receiving any digital license corresponding to the digital content, the computing device also having:

a memory for storing any digital license corresponding to the digital content;

15 a rendering application for attempting to render the digital content; and

a Digital Rights Management (DRM) system for being invoked by the rendering application upon such rendering application attempting to render the digital content, the DRM system for determining whether a right to render the digital content in the manner sought exists based on any digital license stored in the computing device and corresponding to the digital content.

57. The architecture of claim 56, wherein the content server is communicatively coupled to the Internet and distributes the digital content over the Internet.

58. The architecture of claim 56, wherein the license server is communicatively coupled to the Internet and issues the at least one digital license over the Internet.

30

59. The architecture of claim 56, wherein the content server is also communicatively coupled to a portable medium writer and distributes the digital content on a portable medium written by the portable medium writer, the portable medium selected from the group consisting of an optical storage medium and a magnetic storage medium,
5 and wherein the computing device includes a portable medium reader corresponding to the portable medium writer for receiving and reading the portable medium.

60. The architecture of claim 56, wherein the content server distributes the digital content in an encrypted form.

10

61. The architecture of claim 60, wherein each digital license corresponding to the digital content includes:

a decryption key that decrypts the encrypted digital content; and
a description of the rights conferred by the license, wherein the
15 encrypted digital content cannot be decrypted and rendered without obtaining such license from the license server.

62. The architecture of claim 61, wherein each digital license corresponding to the digital content further includes a digital signature that binds the
20 license to the encrypted digital content.

63. The architecture of claim 56, wherein if the DRM system determines that the right to render the digital content in the manner sought does not exist based on any digital license stored in the computing device and corresponding to the
25 digital content, such DRM system directs a computing device user to the license server to obtain a digital license to render such digital content in the manner sought.

64. The architecture of claim 56, wherein if the DRM system determines that the right to render the digital content in the manner sought does not exist
30 based on any digital license stored in the computing device and corresponding to the

digital content, such DRM system transparently obtains a digital license from the license server without any action necessary on the part of a computing device user.

65. The architecture of claim 56, wherein the DRM system includes a
5 license store for storing digital licenses.

66. The architecture of claim 56, wherein each digital license
corresponding to the digital content is bound to such digital content.

10 67. The architecture of claim 66, wherein each digital license
corresponding to the digital content is bound to such digital content by way of a public /
private key technique.

68. The architecture of claim 56, wherein the license server issues a
15 digital license to a DRM system only if the license server trusts such DRM system to abide
by the license.

69. The architecture of claim 68, wherein the content server distributes
the digital content in an encrypted form, and wherein the DRM system includes a trusted
20 black box for performing decryption and encryption functions for such DRM system.

70. The architecture of claim 69, wherein the black box includes a
unique public / private key pair for performing the decryption and encryption functions.

25 71. The architecture of claim 70, wherein the license server issues each
digital license in response to a license request from the DRM system, the license request
including the black box public key, the license server encrypting at least a portion of the
digital license according to the black box public key prior to issuance of such license,
thereby binding such license to such black box.

30

72. The architecture of claim 71, wherein the content server distributes the digital content in an encrypted form, wherein each digital license corresponding to the digital content includes a decryption key that decrypts the encrypted digital content, and wherein the license server encrypts the decryption key in the license according to the black box public key.

73. The architecture of claim 72, wherein each digital license corresponding to the digital content further includes a description of the rights conferred by the license, wherein the encrypted digital content cannot be decrypted and rendered without obtaining such license from the license server, and wherein the license server encrypts the rights description in the license according to the decryption key.

74. The architecture of claim 69, wherein the black box includes a version number.

75. The architecture of claim 74 wherein the license server issues each digital license in response to a license request from the DRM system, the license request including the version number of the black box, the license server determining prior to issuance of the license whether the version number of the black box is acceptable, the license server upon determining that the version number of the black box is not acceptable refusing to issue the license until the black box is updated, the architecture further comprising a black box server for providing an updated black box to the DRM system.

76. The architecture of claim 69, wherein the black box includes a certifying authority signature as provided by an approved certifying authority.

77. The architecture of claim 76 wherein the license server issues each digital license in response to a license request from the DRM system, the license request including the certifying authority signature, the license server determining prior to issuance of the license whether the certifying authority signature is valid.

78. The architecture of claim 68, wherein each digital license corresponding to the digital content includes a description of the rights conferred by the license, and wherein the DRM system includes a trusted license evaluator for evaluating the rights description and allowing rendering of the digital content by the rendering application only if such rendering is in accordance with the rights description of the license.

79. The architecture of claim 56 further comprising an issued license database for maintaining information on digital licenses issued by the license server, wherein if the computing device loses a received license, a re-issue thereof may be provided based on the information in the issued license database.

80. The architecture of claim 56 further comprising an authoring tool for authoring the digital content distributed by the content server in a form amenable to the architecture.

81. The architecture of claim 80 wherein the authoring tool encrypts the digital content according to a decryption key and stores information on the digital content and the encryption key in a content-key database.

82. The architecture of claim 81 wherein the license server accesses the information on the digital content and the encryption key in the content-key database prior to issuance of a license corresponding to the digital content, and includes the decryption key with such license as issued.

83. An enforcement architecture for digital rights management, wherein the architecture enforces rights in protected digital content, the architecture comprising:
an authoring tool for authoring the digital content in a form amenable to the architecture;

from the group consisting of an optical storage medium and a magnetic storage medium.

89. The architecture of claim 1, wherein the content server distributes the digital content in an encrypted form.

5

90. The architecture of claim 89, wherein each digital license corresponding to the digital content includes:

a decryption key that decrypts the encrypted digital content; and

a description of the rights conferred by the license, wherein the

10 encrypted digital content cannot be decrypted and rendered without obtaining such license from the license server.

91. The architecture of claim 90, wherein each digital license corresponding to the digital content further includes a digital signature that binds the
15 license to the encrypted digital content.

92. The architecture of claim 83, wherein a computing device user is directed to the license server by the DRM system to obtain a digital license to render the digital content in the manner sought if the DRM system determines that the right to render
20 such digital content in the manner sought does not exist based on any digital license stored in the computing device and corresponding to the digital content.

93. The architecture of claim 83, wherein the DRM system transparently obtains a digital license from the license server without any action necessary
25 on the part of a computing device user if the DRM system determines that the right to render the digital content in the manner sought does not exist based on any digital license stored in the computing device and corresponding to the digital content.

94. The architecture of claim 83, wherein each digital license
30 corresponding to the digital content is bound to such digital content.

094393-0130
000000-000000

Abstract of the Invention

5 An enforcement architecture and method for implementing digital rights
management are disclosed. Digital content is distributed from a content server to a
computing device of a user and received, and an attempt is made to render the digital
content by way of a rendering application. The rendering application invokes a Digital
Rights Management (DRM) system, and such DRM system determines whether a right to
10 render the digital content in the manner sought exists based on any digital license stored in
the computing device and corresponding to the digital content. If the right does not exist, a
digital license that provides such right and that corresponds to the digital content is
requested from a license server, and the license server issues the digital license to the
DRM system. The computing device receives the issued digital license and stores the
15 received digital license thereon.

00482032-011300
00000000-000000

Digital Content Package <u>12p</u>
KD (Digital Content <u>12</u>)
Content ID
Key ID
License Acquisition Info
KD (PU-CS) S (PR-CS)

Fig. 3

License <u>16</u>
Content ID
DRL <u>48</u> or KD (DRL <u>48</u>)
PU-BB (KD)
S (PR-LS)
CERT (PU-LS) S (PR-CS)

Fig. 8

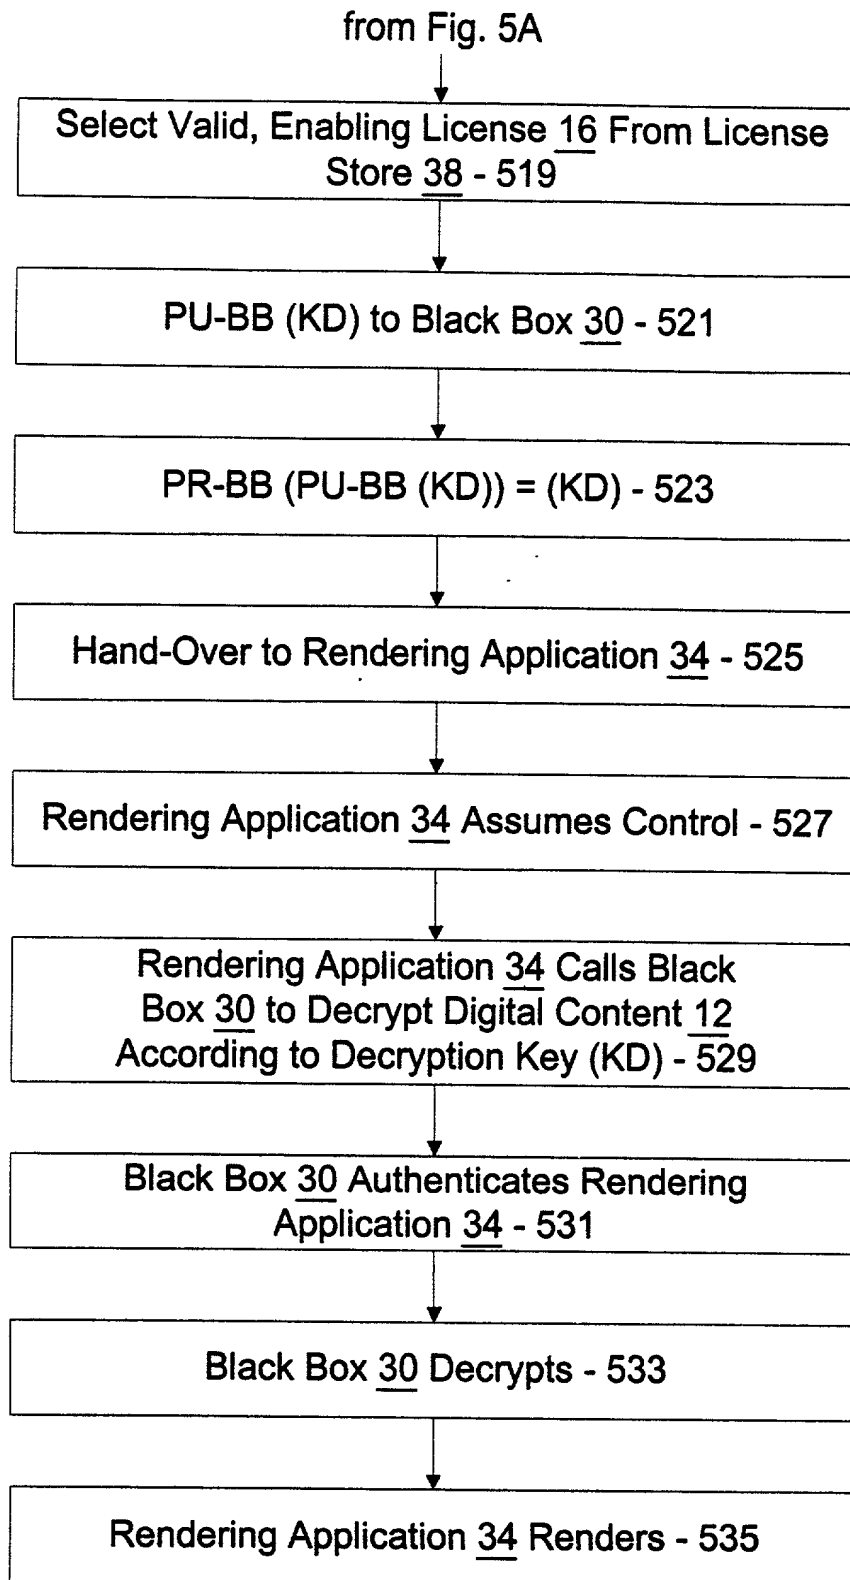


Fig. 5B

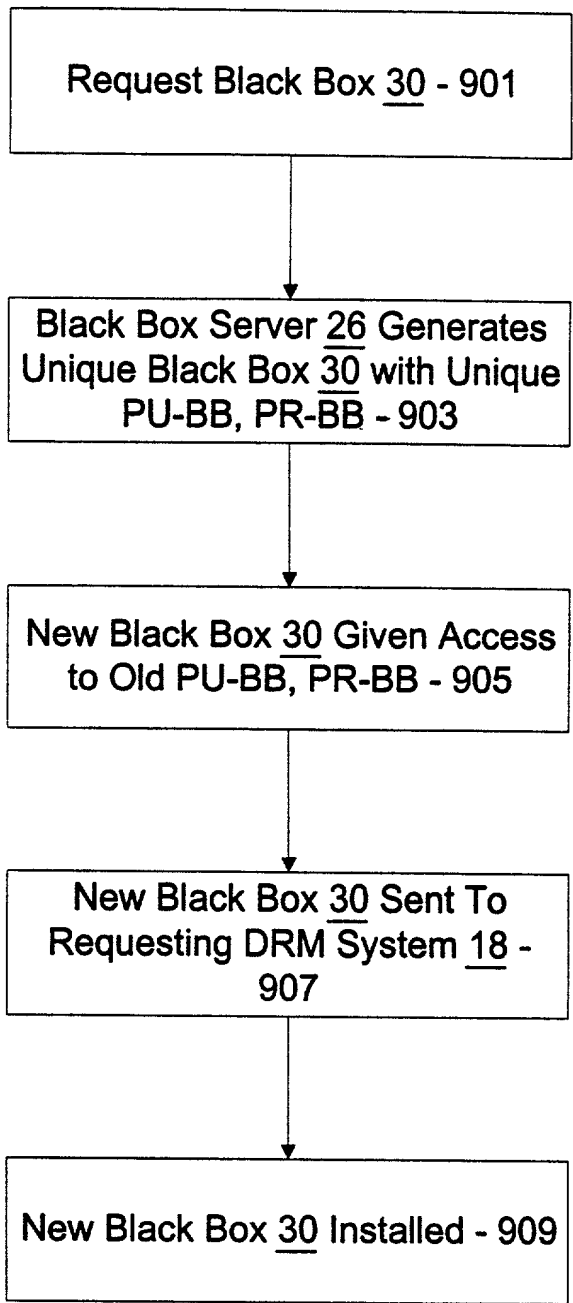


Fig. 9

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of:

Marcus PEINADO, Rajasekhar ABBURI, Arnold N. BLINN, Thomas C. JONES, John L. MANFERDELLI, Jeffrey R.C. BELL, Ramaranthnam VENKATESAN, Paul ENGLAND, Mariusz H. JAKUBOWSKI, Hai Ying (Vincent) YU

Group Art Unit: 2766

Examiner: Not Yet Assigned

For: ENFORCEMENT ARCHITECTURE AND METHOD FOR DIGITAL RIGHTS MANAGEMENT

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a

☒ Utility Patent

☐ Design Patent

is sought on the invention, whose title appears above, the specification of which:

☐ is attached hereto.

☒ was filed on April 12, 1999 as Serial No. 09/290,363.

☐ said application having been amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to the patentability of this application in accordance with 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a-d) of any **foreign application(s)** for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed.

Priority Claimed (If X'd)	Country	Serial Number	Date Filed
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §120 of any **United States application(s)** listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Serial Number	Date Filed	Patented/Pending/Abandoned
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States **provisional application(s)** listed below:

Serial Number	Date Filed
<u>60/126,614</u>	<u>March 27, 1999</u>
_____	_____

I hereby appoint the following persons as attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Katie E. Sato Registration No. 32,628

Daniel D. Crouse Registration No. 32,022

of **MICROSOFT CORPORATION**, One Microsoft Way, Redmond, WA 98052 and

Steven J. Rocci Registration No. 30,489

Steven H. Meyer Registration No. 37,189


of **WOODCOCK WASHBURN KURTZ MACKIEWICZ & NORRIS LLP**, One Liberty Place – 46th Floor, Philadelphia, Pennsylvania 19103.


Please address all telephone calls and correspondence to:


Steven H. Meyer
**WOODCOCK WASHBURN KURTZ
MACKIEWICZ & NORRIS LLP**
One Liberty Place – 46th Floor
Philadelphia, PA 19103
Telephone: (215) 568-3100

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

00EFTD-22628400

Name: Marcus PEINADO	Signature:  Date of Signature: _____ Citizenship: <u>German</u>
Mailing Address: 5007-148 th Avenue NE, #E207 Bellevue, Washington 98007	
City/State of Actual Residence Bellevue, Washington 98007	

Name: Rajasekhar ABBURI	Signature:  Date of Signature: <u>12/1/2011</u> Citizenship: <u>India</u>
Mailing Address: 7844 NE 10 th Street Medina, Washington 98039	
City/State of Actual Residence Medina, Washington 98039	

Name: Arnold N. BLINN	Signature:  Date of Signature: _____ Citizenship: <u>United States</u>
Mailing Address: 9401 NE 27 th Street Bellevue, Washington 98004	
City/State of Actual Residence Bellevue, Washington 98004	

DOCKETED-2011-12-01

Priority Claimed (If X'd)	Country	Serial Number	Date Filed
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §120 of any **United States application(s)** listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Serial Number	Date Filed	Patented/Pending/Abandoned
<u>09/290,363</u>	<u>April 12, 1999</u>	<u>Pending</u>
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States **provisional application(s)** listed below:

Serial Number	Date Filed
<u>60/126,614</u>	<u>March 27, 1998</u>
_____	_____

I hereby appoint the following persons as attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

005770-22623460

Name: Marcus Peinado	Signature: _____ Date of Signature: _____ Citizenship: German
Mailing Address: 5007-148 th Avenue NE, #E207 Bellevue, Washington 98007	
City/State of Actual Residence Bellevue, Washington 98007	

Name: Rajasekhar Abburi	Signature: _____ Date of Signature: _____ Citizenship: India
Mailing Address: 7844 NE 10th Street Medina, Washington 98039	
City/State of Actual Residence Medina, Washington 98039	

Name: Jeffrey R.C. Bell	Signature: _____ Date of Signature: _____ Citizenship: United States
Mailing Address: 107 N. 67th Street Seattle, Washington 98103	
City/State of Actual Residence Seattle, Washington 98103	

09EFT0"22023460